

CSE GROUP

<http://www.csee.com.tw>

Head office

TAIWAN

CSE. CHIANG SUNG ENTERPRISE CO., LTD.

No.65, Sheng Kung 1 St Rd. Pei Tou, Industrial Park, Changhua, Taiwan
TEL: +886-4-8876919(Rep) FAX: +886-4-8876918
E-mail:csee@ms57.hinet.net

THAILAND

CSE TECHNOLOGIES CO., LTD.

Factory:

39,39/1 moo 7 Petkaseam Rd, Nongchumpon, Khaoyoy,
Petchaburi, Thailand 76140
Tel:+66-327-96234, +66-327-96225~6 Fax:+66-327-96247

Office:

Tel: +66-24158051-3 Fax. +66-24158059
E-mail: sales@csetechnologies.co.th

CHINA

FUJIAN CHIANG SHIN HARDWARE MACHINERY CO.,LTD.

Xing Tai Industrial Zone RC Chang Tai Zhang Zhou Fujian
TEL: +86-596-8310856 FAX: +86-596-8310866



CSE BPE

Pharmaceutical / Biotechnology
Control Equipment



Worldwide service:

New York | India | Thailand | China | Xiamen | Guangzhou | France



1142



ASME BPE CERTIFIED QUALITY



The American Society of Mechanical Engineers



CERTIFICATE OF AUTHORIZATION



The named company is authorized by the American Society of Mechanical Engineers (ASME) for the scope shown below in accordance with the applicable rules of the ASME BPE Standard on Bioprocessing Equipment. The use of the certification mark and the authority granted by this Certificate of Authorization are subject to the provisions of the agreement set forth in the application. Any component certified under this authorization shall have been produced, assembled, and tested in accordance with the provisions of the aforementioned ASME standard.

COMPANY:
CSE. Chiang Sung Enterprise Co., Ltd.
CSE Technologies Co., Ltd.
39, 39/1 MOO 7 NONGCHUMPON KHAOYOY
PETCHABURI 76140
Thailand


SCOPE:
Manufacture of ferrous tubing (excluding circumferential welds) and fittings,
with electropolishing at the above location only.

AUTHORIZED: August 20, 2018
EXPIRES: August 20, 2023
CERTIFICATE NUMBER: BPE-122

Richard Robertson
 Vice President, Conformity Assessment
Joseph L. ...
 Managing Director, Conformity Assessment

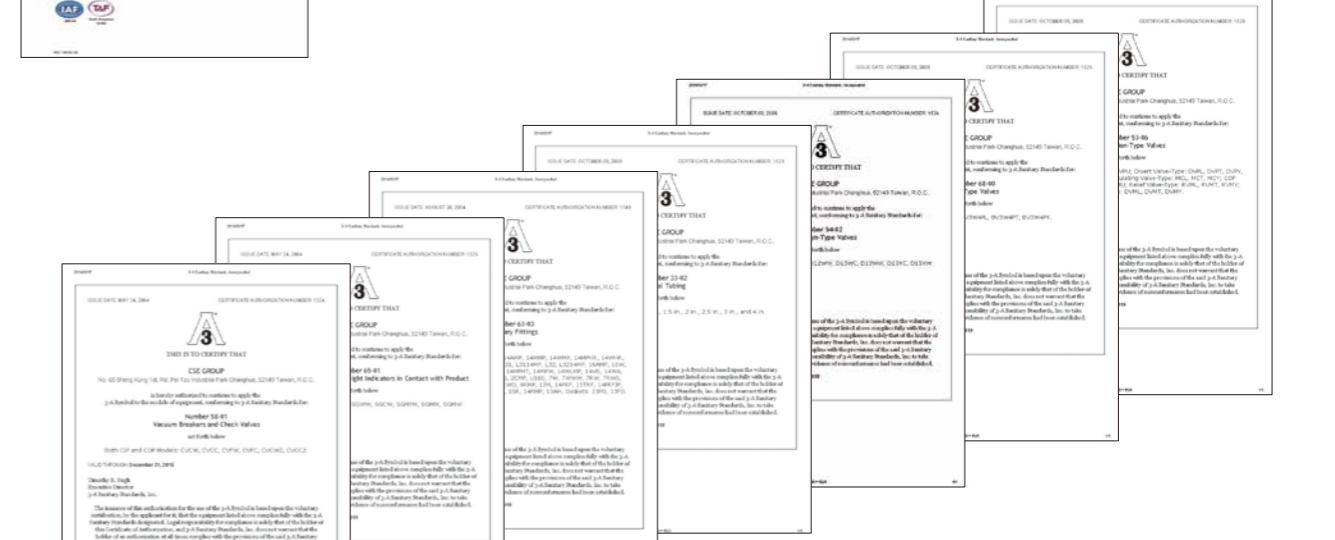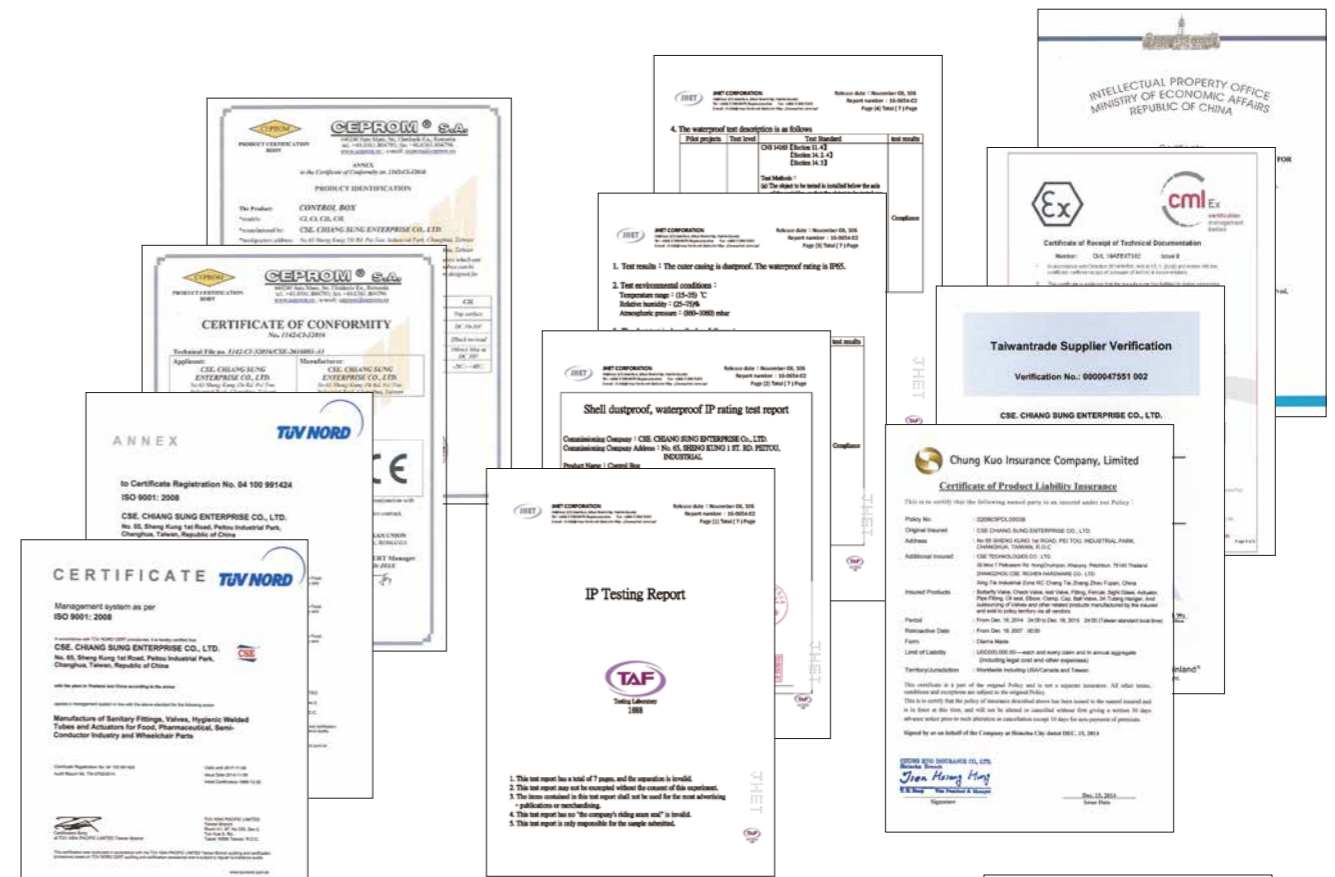

C.S.E. is certified by 3A and TÜV ISO 9001 with EN10204 3.1 material cert. will be your assurance of outstanding quality & service.

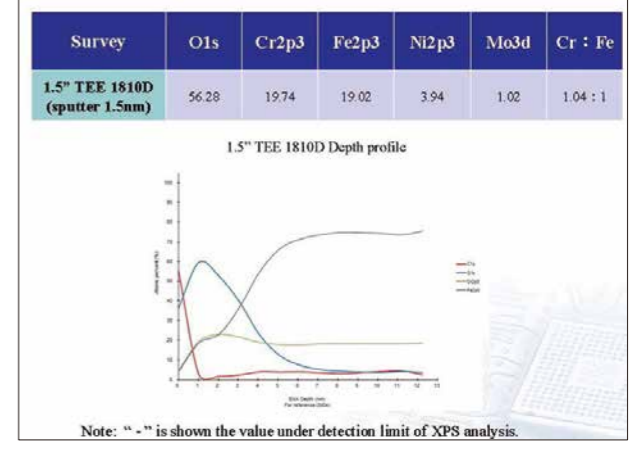



About CSE Group

Maximum Purity With Guaranteed Ra

Where cleanability of fittings is the issue, every step in the production process must be carefully controlled. Our production methods insure that no mechanical damage or flaws occur during manufacturing.

The cleaning procedures incorporate multi-process degreasing and washing steps provided to eliminate any residues of hydrocarbons and stains, using pure deionized water.

Our procedures and process capabilities result in the formation of a stabilized passive layer and increased corrosion resistance.

Our products proudly offer:

Maximum Cleanability

CSE fittings are cleaned using a multiple step process to assure clean surface, areas inside and out with repeatability every time.

Every fitting is passivated according to ASME BPE and ASTM A967 standards.

Full Traceability

We provide full traceability for each of our products by supplying all necessary production process data. Starting from certifications and incoming inspection of raw materials, through in-process quality control, final inspection, marking and packaging. The process is also completely documented with a unique job number for each BPE process component.

Every Fitting is Quality Inspected

All around quality and meticulous inspection insures that every fitting will be of the highest quality and in total compliance with all ASME-BPE standards.

CSE fittings are 100% visual inspected.

CSE Group

CSE own the international advanced production line and testing equipment, we focus on the quality control and devoted our professional engineers, skilled workforce into the each requirement from customers. CSE always put the demand of customer in our first consideration and keep on pursuing the promotion and innovation of the products. Therefore we enjoy in growing up with our customer to create the win-win situation.



Index

BPE Specialized Technology

The different of EP & MP
Mechanical Polishing (MP) & Electro-Polishing (EP)
Fittings Specifications
Professional technical equipment and production
Precision and strict quality control process



Page 05 - 10

BPE Auto / Manual Control Valves

Pneumatic/Manual Diaphragm Valve 2WAY
Tank Bottom Valve
Tank Bottom Valve (Pneumatic/Manual)
Construction Summarization
Pneumatic/Manual Diaphragm Valve T-TYPE 3WAY
Pneumatic/Manual Diaphragm Valve 3WAY/U-Bend Valve
Multi-port Diaphragm Valve
Block Diaphragm Valve



Page 11 - 20

CSE Hygienic Sample Valve for BPE

Hygienic Sample Valve for BPE
CSE Sample Cock Valve
CSE Diaphragm Sample Valve



Page 21 - 23

Auto Control Valve & Manual Control Valve



Page 24

CSE Hygienic Filter & OEM for BPE

Bellow Sterile Valves
CSE STRAINERS
Sanitary Standard Pressure Gauge



Page 25 - 28

BPE Pharmaceutical/Biotechnology Fitting & Tube

CSE HIGH PURITY TUBE & FITTING VALVE (ASME BPE STANDARD)
BPE Stainless Steel Tubing
Marking
BPE Fittings
Heavy Duty Clamp-Ring
Ferrule Seal



Page 29 - 50

BPE Specialized Technology

What is EP ?


EP is surface condition processing technology, which can be applied on various metal (Stainless steel, alloy steel etc) for obtaining high clean quality on surface. EP process on stainless steel metal can obtain an advantage on metal surface with smooth, Clean, bacteria free and superior corrosion resistance finished .



The different of EP & MP

1

Semi-finished Goods

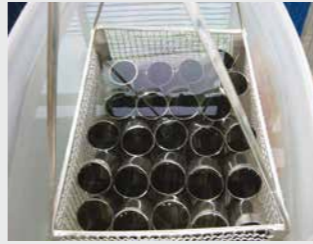


2

Products Processed




3

Cleaning The Finished




4

Inspect




5

Finished Products



Mechanical Polishing (MP) & Electro-Polishing (EP)



Although mechanical polishing (MP) is able to reduce the roughness from smeared stainless surface rapidly, there are still some defects:

1. Surface roughness (Ra) is only approx. 0.3-0.5 μ m that still has great possibility of adhering particles.
2. The passivation layer must be destroyed after MP and caused rust easily.
3. During MP, the particle adhering problem on the interior surface is too tough to meet perfect purity even if after high purity cleaning procedure.




The performance of Electro-Polishing is able to smooth away all the defects of MP.

The features of EP are as following:

1. The stainless surface is dissolved by EP liquid to remove all the particles and reduce roughness (Ra) to 0.05 μ m.
2. During EP process, Fe ion separates out first of all and let a passivation layer (Cr₂O₃) be created on the stainless surface for higher resistance of corrosion.



Perfect mirror finished surface without any impurities.

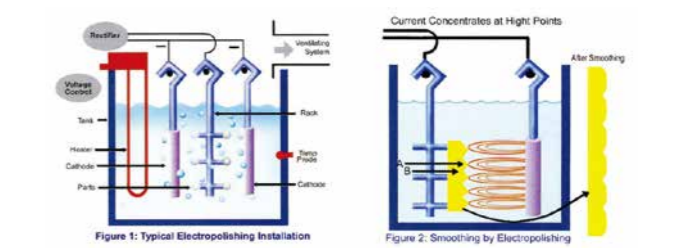

Advantage of EP

1. Superior performance in polishing : It can dramatically improve the surface roughness on metal to Ra 0.05 μ m.
2. High purity : EP can remove particle, as well metal fatigue and oxidized metal from work piece, as well make surface smoothly, on which bacteria can not survived. Smooth surface will help to solve the problem of particle adherent.
3. High resistance of corrosion : Passivation layer is a very important product, which is created on the surface of stainless steel during EP process. Stainless steel work piece processed with EP can obtain around 10 times corrosion resistance superior than no-EP one.

Fittings Specifications

Product:

Stainless Steel fittings comply with ASME BPE standards.

Gaskets are made from compounds which are FDA approved and USP 87, 88 Pharmaceutical Class VI certified.


Sizes:

Stainless Steel fittings are available in sizes 1/4" - 6" O.D. tube size.


Material:

Fittings are fabricated in AISI 316L Stainless Steel with sulfur content of 0.005-0.017% achieving superior repeatability for automatic orbital welding process.


Roundness




Wall Thickness




Squareness Face to Tangent





Off Angle



Off Plane



Height

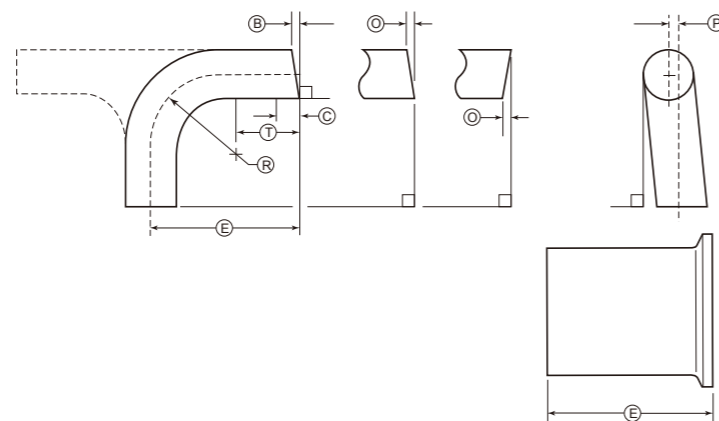

General Notes:

- Tolerance on (E) end-to-end and center-to-end: 0.050 in. (1.27 mm)
- Tolerance for centerline radius (CLR) is $\pm 10\%$ of the nominal dimension

Dimensions & Tolerances:

Dimensions as specified in ASME BPE Part DT-3-1

Nominal Size	O.D.		Wall Thickness Mechanical Polish (MP)		Wall Thickness Electropolish (EP)		Squareness Face to Tangent, B		Off Angle, O		Equivalent Angle (for O) deg	Off Plane, P		Centerline Radius (CLR), R	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		in.	mm	in.	mm
1/4	± 0.005	± 0.13	+0.003/-0.004	+0.08/-0.10	+0.003/-0.006	+0.08/-0.15	0.005	0.13	0.009	0.23	2.1	0.030	0.76	0.563	14.30
3/8	± 0.005	± 0.13	+0.003/-0.004	+0.08/-0.10	+0.003/-0.006	+0.08/-0.15	0.005	0.13	0.012	0.3	1.8	0.030	0.76	1.125	28.58
1/2	± 0.005	± 0.13	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.005	0.13	0.014	0.36	1.6	0.030	0.76	1.125	28.58
3/4	± 0.005	± 0.13	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.005	0.13	0.018	0.46	1.4	0.030	0.76	1.125	28.58
1	± 0.005	± 0.13	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.008	0.20	0.025	0.64	1.4	0.030	0.76	1.500	38.10
1 1/2	± 0.008	± 0.20	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.008	0.20	0.034	0.86	1.3	0.050	1.27	2.250	57.15
2	± 0.008	± 0.20	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.008	0.20	0.043	1.09	1.2	0.050	1.27	3.000	76.20
2 1/2	± 0.010	± 0.25	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.010	0.25	0.054	1.37	1.2	0.050	1.27	3.750	95.25
3	± 0.010	± 0.25	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.016	0.41	0.068	1.73	1.3	0.050	1.27	4.500	114.30
4	± 0.015	± 0.38	+0.008/-0.010	+0.20/-0.25	+0.008/-0.012	+0.20/-0.30	0.016	0.41	0.086	2.18	1.2	0.060	1.52	6.000	152.40
6	± 0.030	± 0.76	+0.015/-0.015	+0.38/-0.38	+0.015/-0.017	+0.38/-0.43	0.030	0.76	0.135	3.43	1.3	0.060	1.52	9.000	228.60

Fittings Specifications

Surface Finish:

Reference: ASME BPE-2014, Part SF, Table SF-2.4-1.

Surface Finish Code	BPE Surface Designation	Ra Maximum		Inside Surface Surface Condition	Outside Surface Surface Condition
		μ-in.	μm		
PX	SF0			No finish requirement	No finish requirement
PC	SF1	20	0.51	Mechanically Polished [1]	Light Polish
PL	SF1	20	0.51	Mechanically Polished [1]	Mechanically polished to 32 Ra μ-in.
PD	SF4	15	0.38	Mechanically Polished [1] & Electropolished	Light Polish
PM	SF4	15	0.38	Mechanically Polished [1] & Electropolished	Mechanically polished to 32 Ra μ-in.
PR	-	10	0.25	Mechanically Polished [1] & Electropolished	Mechanically polished to 32 Ra μ-in.

[1] Or any other finishing method that meets the Ra max.

- CSE fittings guarantee the Ra in all internal surfaces, including bent areas where it is difficult to polish and difficult to measure.
- All Ra readings are taken across the lay, wherever possible.
- No single Ra reading shall exceed the Ra max. value in this table.
- Other Ra readings are available if agreed upon between owner/user and supplier, not to exceed values in this table.

Cleaning:

A multi step cleaning cycle is conducted to ensure that fittings are cleaned with a perfect passivation layer. The cleaning process involves degreasing, pickling, electro polishing (as required) and passivation. During the final stage, the fittings are double-rinsed using D.I. water.

Inspection Procedures:

All fittings produced by CSE production are 100% visually inspected for any surface finish imperfections, as mentioned in Table SF-2.2-1, SF-2.2-2, SF-2.4-1 and SF 2.6-1 in the ASME BPE 2014 specification. All dimensional characteristics are inspected for tolerances listed in parts DT-3-1 to DT-9.3-1 in the ASME BPE 2014 specification.

Fitting Marking Information:

Each fitting and process component is permanently laser Marked to show the following:

- Heat number/code traceable to material test report for each product contact surface component
- Material type
- Manufacturer's name, logo, & trademark
- Product contact surface designation for the appropriate BPE specification
- ASME BPE mark

Packaging & Labeling:

Each fitting is capped, bagged and labeled in full compliance with the ASME BPE standard. Every label includes a QR Code which directs to the fitting's Material Test Report.

Documentation:

Full Material Test Reports are supplied with the finished products and are available On-Line at www.csee.com.tw

Professional technical equipment and production



Spectrum Analysis Machine

Precision and strict quality control process



Orbital Welding



Roughness Check



2.5D for surface Check




Vernier Caliper




Bright Annealing Process After Form



BPE EP Inspect

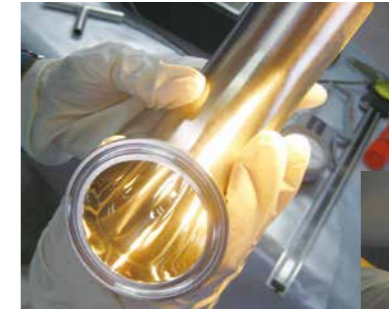

BPE EP Processing

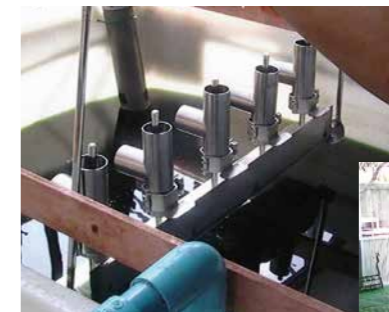


Welded License



BPE Auto / Manual Control Valves


For many years, CSE Group always base on the highest principle of "To Attain The Minimum Residual" & "Zero Blind Spot" for the Diaphragm Valve designed. Now, we are the first assigns the brand for The cGMP & The National Health Research (NHRI)...and the other famous Pharmaceutical Factories. In addition, the designed also conform to BPE Standard.

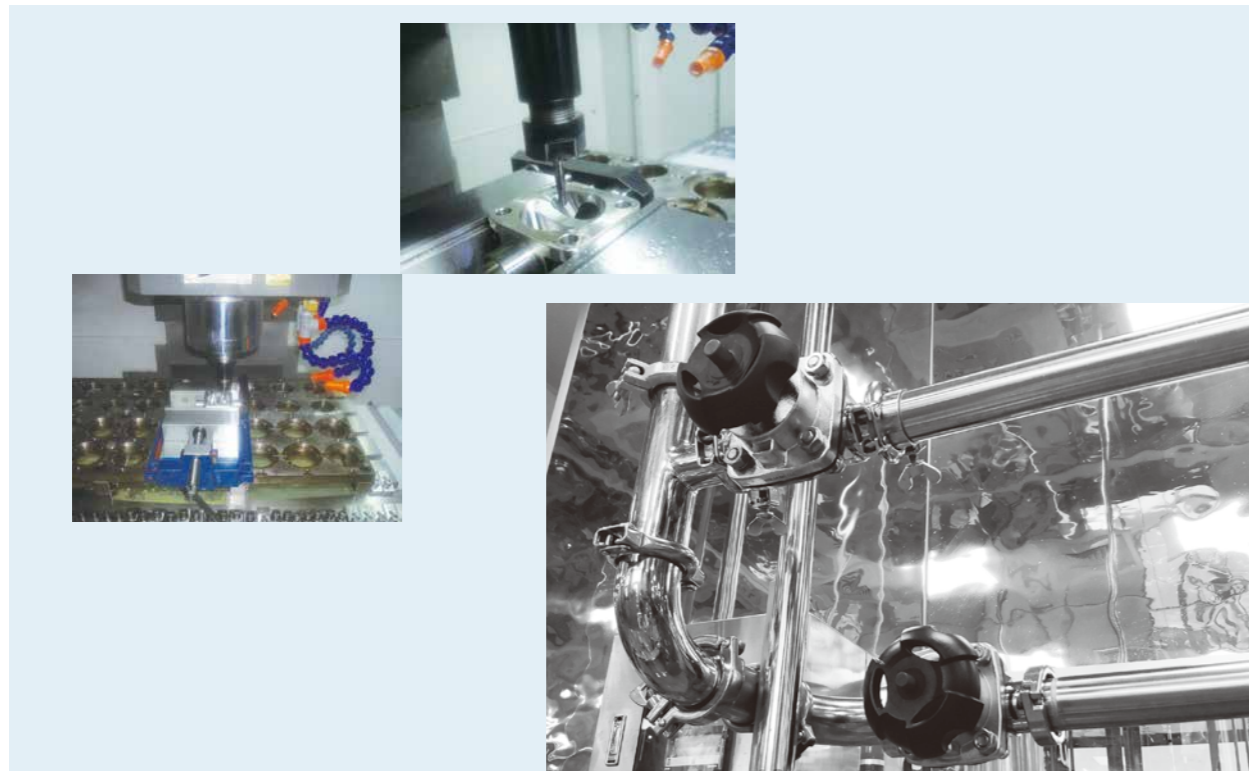

A comfortable & reliability handle design is suitable for multi valves ensuring easily operations.

Positioning indicator

The diaphragm seat is with all-round sealing edge.

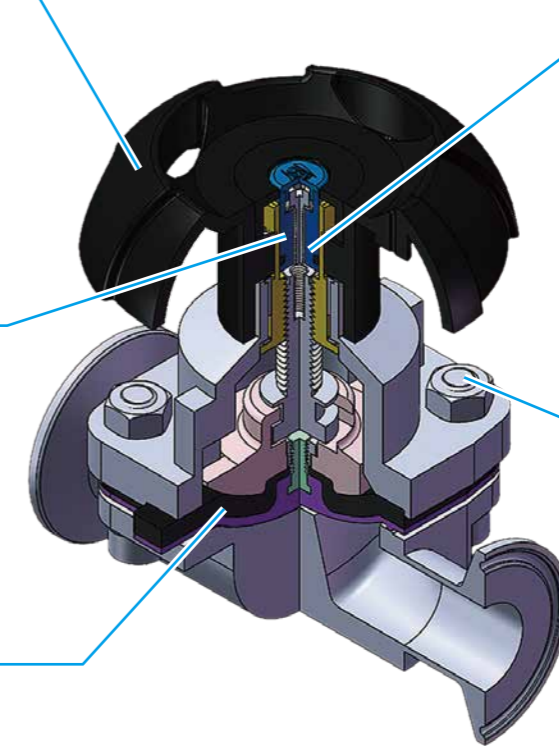

O-Ring sealing


Not loose screw parts during working.

Stainless steel actuator

Piston drive

Air connector

The diaphragm seat is with all-round sealing edge.

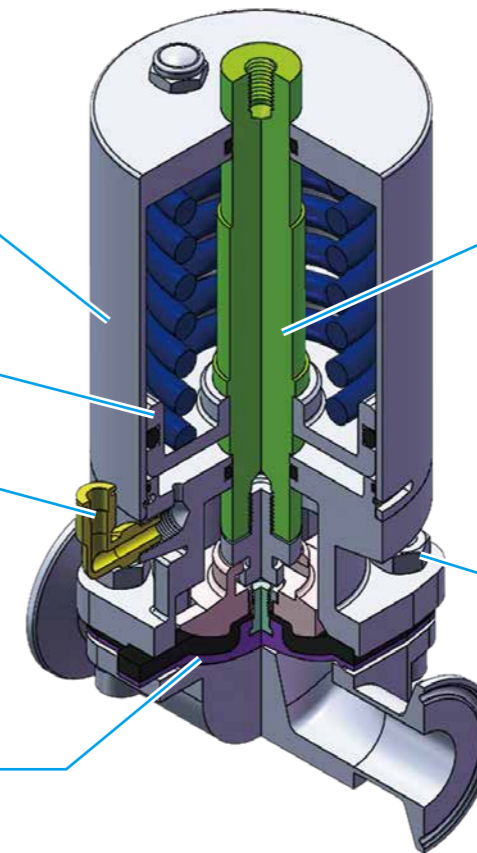

Stem

Not loose screw parts during working.



Body

All the materials of the body is 316L & Forged. The surface can be divided into two kinds- Sand Blasted & Electrolytic Polished (EP).


With the external body Electrolytic Polished. It improves the corrosion resistance and makes the external appearance more bright and beautiful as well. The Body ends connection sizes are processed by high precision CNC. Then, the body's inside is polished by professional polishing technology. CSE Group also can design more bodies according to the clients' requires.




Diaphragm

All the diaphragms in CSE Group meet sanitary and Pharmaceutical Standards and they have gained Certificate of FDA. The Diaphragms are high temperature resistant and strong corrosion resistance; they are of long service life and are widely used.

Internal Structure of the Diaphragm

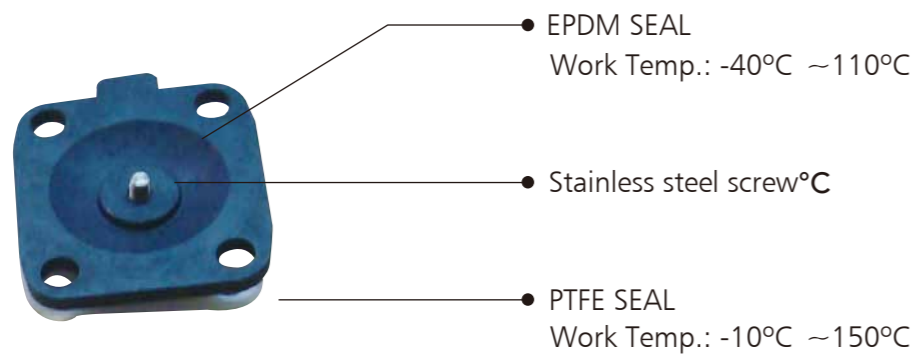


Pneumatic/Manual Diaphragm Valve 2WAY

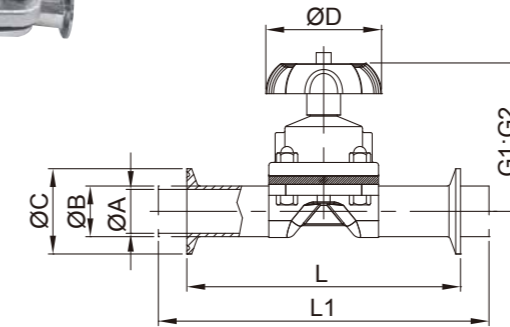

3A/BPE

SIZE	1/2"	3/4"	1"	1.5"	2"
ØA	9.4	15.75	22.1	34.8	47.5
ØB	12.7	19.05	25.4	38.1	50.8
ØC-3A	25	25	50.5	50.5	64
ØC-BPE	25	25	25/50.39	50.39	63.91
ØD	60	60	95	95	118
ØE	60	60	85	85	133
F1	122	122	212	217	315
F2	131	131	225	232	333
G1	74	74	100	119	135
G2	83	83	113	134	153
L	88.9	101.6	114.3	139.7	158.8
L1	124	135	141.2	168.4	190.5

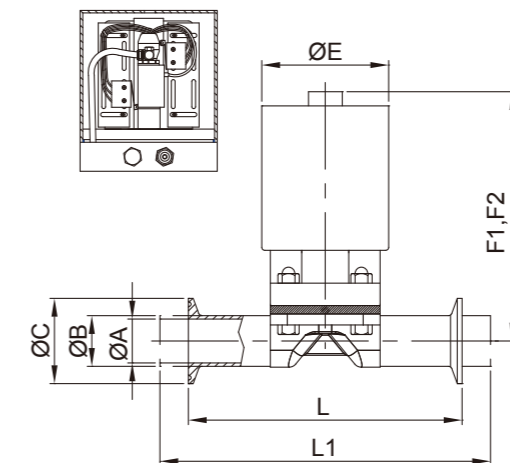

DIN

DIN	DN10	DN20	DN25	DN32	DN40	DN50
ØA	10	20	26	32	38	50
ØB	13	23	29	35	41	53
ØC	34	34	50.5	50.5	50.5	64
ØD	—	60	60	95	95	118
ØE	60	85	85	85	85	133
F1	122	212	212	217	217	315
F2	131	225	225	232	232	333
G1	74	100	100	119	119	135
G2	83	113	113	134	134	153
L	88.9	101.6	114.3	139.7	139.7	158.8
L1	124	135	141.2	168.4	168.4	190.5

Tank Bottom Valve



Material:

- Body: Forged/316L
- Diaphragm: EPDM+PTFE/NC or NO

Connection:

- Clamp End/Weld End...

Operation:

- Normal Open / Normal Close

Work Temp.:


- Diaphragm: EPDM+PTFE (-10°C~150°C)

Work Pressure:

- Max: 10 Bar


Surface:

- SF1: ID Polished to $Ra \leq 0.5\mu m$ / SF4: EP Finished to $Ra \leq 0.38\mu m$
- ID/OD Mirror Polished & ID $Ra \leq 0.5\mu m$ / OD Sand Blasted...

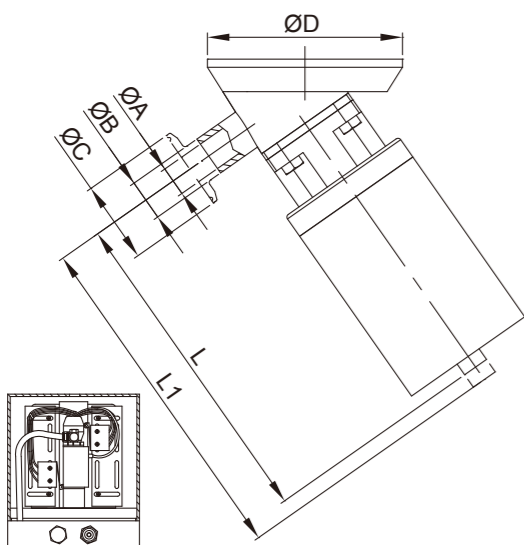

SIZE	1/2"	3/4"	1"	1.5"	2"
ØA	9.4	15.75	22.1	34.8	47.5
ØB	12.7	19.05	25.4	38.1	50.8
ØC	25	25	50.5	50.5	64
ØD	100	100	120	160	160
L	122	122	212	217	315
L1	131	131	225	232	333
L2	74	74	100	119	135
L3	83	83	113	134	153

NEW Control Box

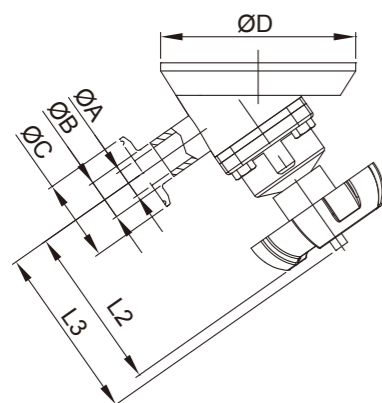

Tank Bottom Valve (Pneumatic/Manual)



“No Residual” & “Zero Blind Spot.” Design

- The material will throw-up with 45 degree to make the body will not residual and it will use CIP System or Ultra-Hight Temperate (UHT) Cleaning design. The design is conform to BPE Standard.

The Actuator can be to “Take off and Replace quickly.”

The Actuator can be set in Control Box.

Construction Summarization




The Flange of Tank Bottom Valves can be welded directly to containers or tank.



The material will throw-up with 45 degree to make the body will not residual


The Body is Forged
The Material is 316L

Pneumatic/Manual Diaphragm Valve T-TYPE 3WAY

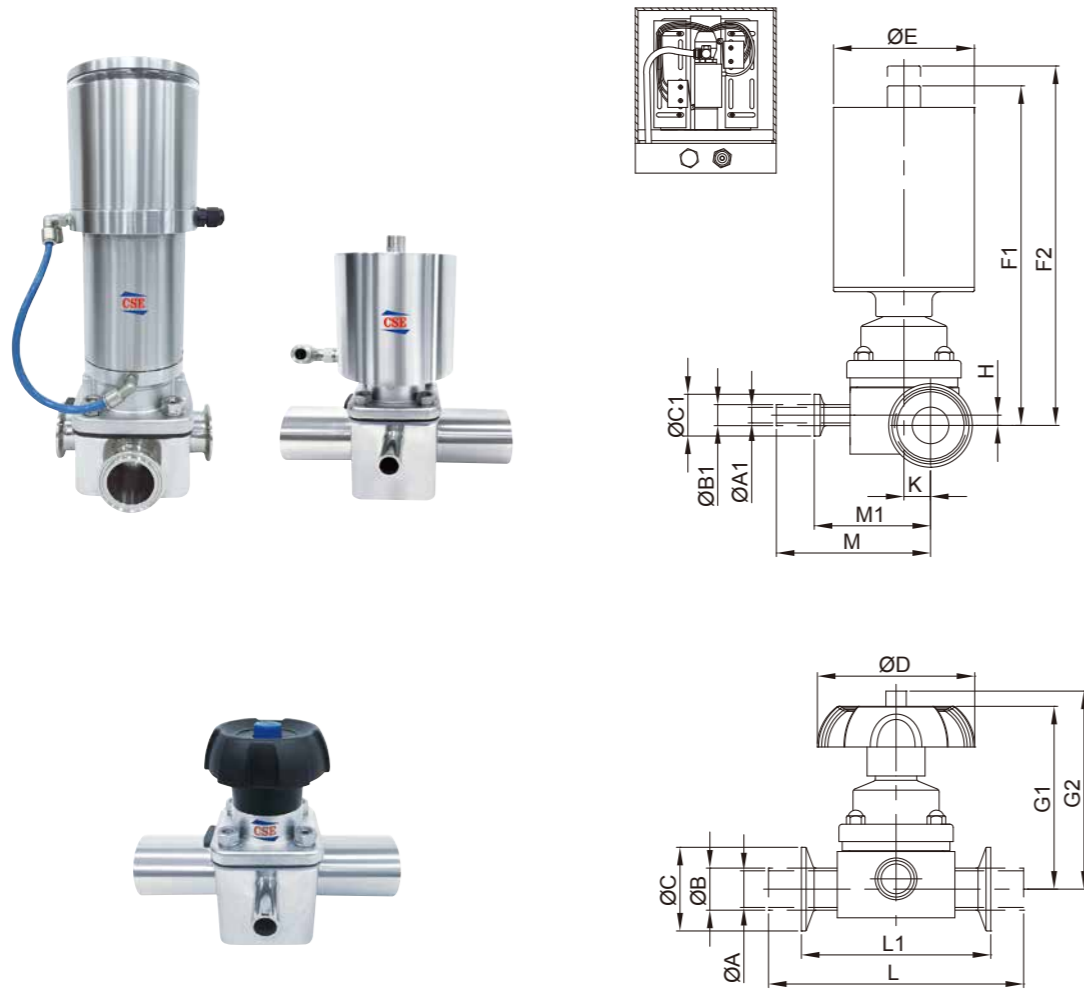

SIZE	1/2"x1/2"	1/2"x3/4"	1/2"x1"	1/2"x1.5"	1/2"x2"	3/4"x3/4"	3/4"x1"	3/4"x1.5"	3/4"x2"	1"x1"	1"x1.5"	1"x2"	1.5"x1.5"	1.5"x2"	2"x2"
ØA	9.4	15.75	22.1	34.8	47.5	15.75	22.1	34.8	47.5	22.1	34.8	47.5	34.8	47.5	47.5
ØB	12.7	19.05	25.4	38.1	50.8	19.05	25.4	38.1	50.8	25.4	38.1	50.8	38.1	50.8	50.8
ØC	25	25	50.5	50.5	64	25	50.5	50.5	64	50.5	50.5	64	50.5	64	64
ØA1	9.4	9.4	9.4	9.4	9.4	15.75	15.75	15.75	15.75	22.1	22.1	22.1	34.8	34.8	47.5
ØB1	12.7	12.7	12.7	12.7	12.7	19.05	19.05	19.05	19.05	25.4	25.4	25.4	38.1	38.1	50.8
ØC1	25	25	25	25	25	25	25	25	25	50.5	50.5	50.5	50.5	50.5	64
ØD	60	60	60	60	60	60	60	60	60	95	95	95	95	95	118
ØE	60	60	60	60	60	60	60	60	60	85	85	85	85	85	133
F1	122	122	122	122	122	122	122	122	122	212	212	212	217	217	315
F2	131	131	131	131	131	131	131	131	131	225	225	225	232	232	333
G1	74	74	74	74	74	74	74	74	74	100	100	100	119	119	135
G2	83	83	83	83	83	83	83	83	83	113	113	113	134	134	153
H	—	6.18	13.2	19.5	19.5	4.5	10.7	17.5	17.5	6.2	14.5	18.4	6.2	13.7	—
K	6.8	9.98	13.15	19.5	25.85	9.98	13.15	19.5	25.85	16.05	22.4	28.75	22.4	28.75	28.75
L	139.7	139.7	154	153.6	153.6	139.7	153.6	153.6	153.6	172.6	172.6	172.6	197.6	197.6	211.6
L1	88.9	88.9	114.3	114.3	114.3	88.9	114.3	114.3	114.3	114.3	114.3	114.3	139.7	139.7	158.8
M	69.4	72.58	75.75	82.1	88.45	72.58	75.75	82.1	88.45	86.65	93	99.35	105	111.35	123.75
M1	51	54.18	57.35	63.7	70.05	54.18	57.35	63.7	70.05	70.6	74.6	80.95	86.6	92.95	98.95

Pneumatic/Manual Diaphragm Valve 3WAY/U-Bend Valve

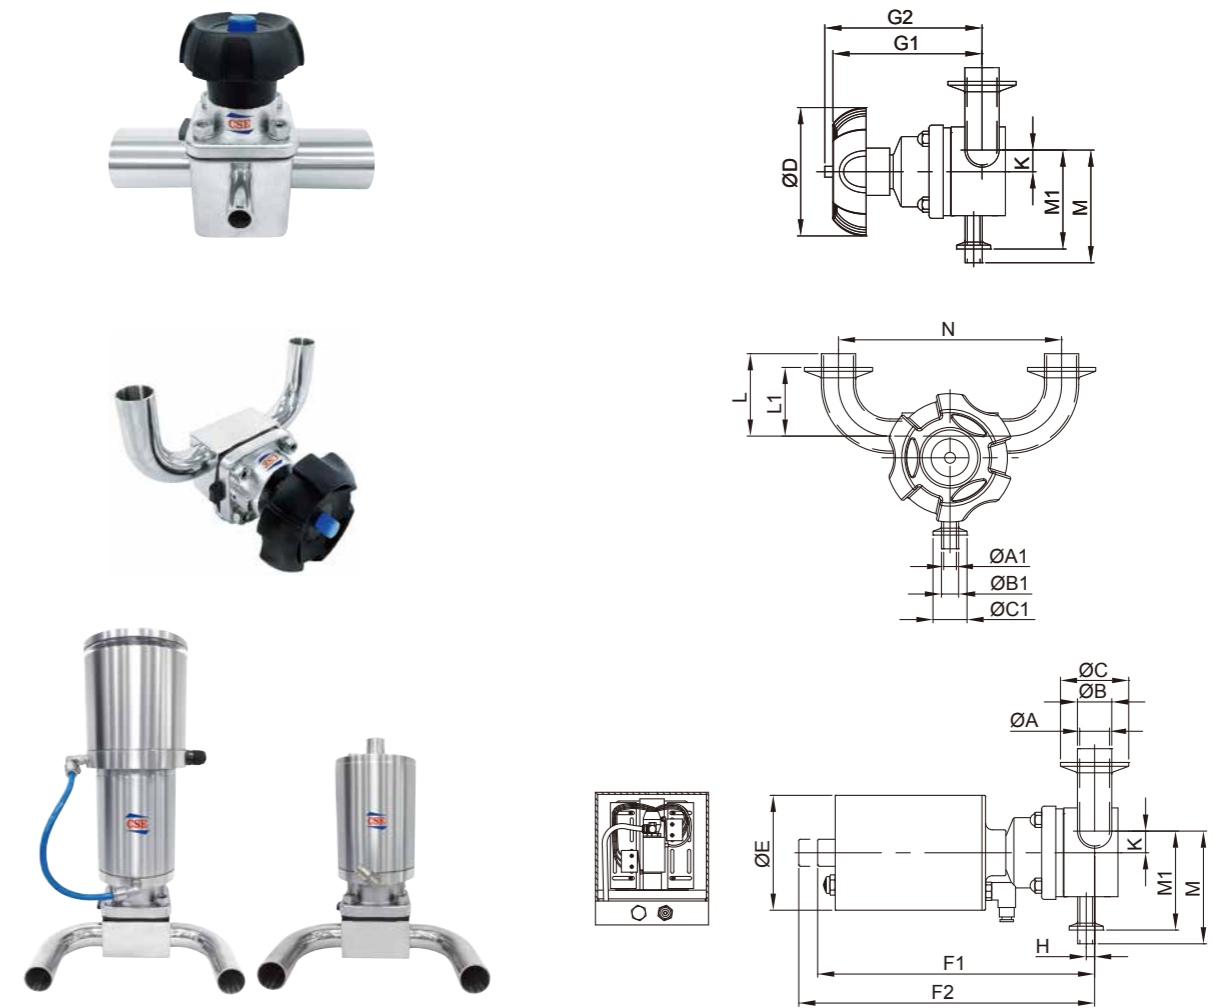


SIZE	1/2"x1/2"	3/4"x1/2"	1"x1/2"	1.5"x1/2"	2"x1/2"	3/4"x3/4"	1"x3/4"	1.5"x3/4"	2"x3/4"	1"x1"	1.5"x1"	2"x1"	1.5"x1.5"	2"x1.5"	2"x2"
ØA	9.4	15.75	22.1	34.8	47.5	15.75	22.1	34.8	47.5	22.1	34.8	47.5	34.8	47.5	47.5
ØB	12.7	19.05	25.4	38.1	50.8	19.05	25.4	38.1	50.8	25.4	38.1	50.8	38.1	50.8	50.8
ØC	25	25	50.5	50.5	64	25	50.5	50.5	64	50.5	50.5	64	50.5	64	64
ØA1	9.4	9.4	9.4	9.4	9.4	15.75	15.75	15.75	15.75	22.1	22.1	22.1	34.8	34.8	47.5
ØB1	12.7	12.7	12.7	12.7	12.7	19.05	19.05	19.05	19.05	25.4	25.4	25.4	38.1	38.1	50.8
ØC1	25	25	25	25	25	25	25	25	25	50.5	50.5	50.5	50.5	64	64
ØD	60	60	60	60	60	60	60	60	60	95	95	95	95	95	118
ØE	60	60	60	60	60	60	60	60	60	85	85	85	85	85	133
F1	122	122	122	122	122	122	122	122	122	212	212	212	217	217	315
F2	131	131	131	131	131	131	131	131	131	225	225	225	232	232	333
G1	74	74	74	74	74	74	74	74	74	100	100	100	119	119	135
G2	83	83	83	83	83	83	83	83	83	113	113	113	134	134	153
H	—	6.18	13.44	19.5	19.5	4.5	10.7	17.5	17.5	6.2	14.5	18.4	6.2	13.7	—
K	6.8	9.98	13.15	19.5	25.85	9.98	13.15	19.5	25.85	16.05	22.4	28.75	22.4	28.75	28.75
L	57.15	66.68	76.2	95.3	120.7	66.68	76.2	95.3	120.7	76.2	95.3	120.7	95.3	120.7	120.7
L1	31.75	41.25	50.8	69.9	88.9	41.28	50.8	69.9	88.9	50.8	69.9	88.9	69.9	88.9	88.9
M	69.4	72.85	75.75	82.1	88.45	72.58	72.75	82.1	88.45	70.6	93	99.35	105	111.35	123.75
M1	51	54.18	57.35	63.7	70.05	54.18	57.35	63.7	70.05	68.25	74.6	80.95	86.6	92.95	98.95
N	101.7	120.7	165.1	203.3	241.3	120.7	165.1	203.3	241.3	165.1	203.3	241.3	228.7	266.7	285.8

Multi-port Diaphragm Valve

TDV TYPE

The multi-port body design is helping to streamline the fitting line and is taking the advantages of the combination of traditional valve position and assembly, and there are options of a variety of angles and positions in series to choose from for venting or steering, often using for sampling or steam.

Level main body at drain angle / vertical sub-body (LAV0 – type) **Vertical main body / horizontal sub-body at drain angle (V0HA – type)**

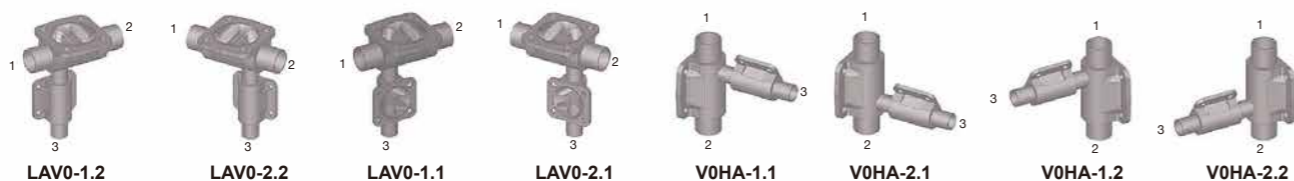

Level main body at drain angle / vertical sub-body at drain angle (LAVA – type) **Level main body at drain angle / horizontal sub-body at drain angle (LAHA – type)**



Block Diaphragm Valve

BDV TYPE

The block diaphragm valve body is designed to be no gap which can ensure completely drain and zero dead angle, and optimize the complex tubing-line system for safe fluid configuration, recommended for horizontal installation position.

LBI90 - type **VBA45 - type** **VOH90 - type** **LBV90 - type** **UBI90 – type** **BOI90- type**



Eccentric bodies for sampling **Center bodies for sampling** **Fully integrated type**

A-type **B-type** **C-type** **D-type** **A-type** **B-type** **C-type** **D-type** **Fully integrated type**



Diaphragm valve with sub-body connecting and block type ones that composed of two or more valve bodies both are an innovative concept design combined with modern processing technology. The multi-port direction valve body is convenient to connect to different tubing-lines which can save installation time and space, it can also be designed according to customized requirements as multi-angle or installing location. These types of valve bodies made of forged or cast materials are mostly used for sampling or steam applications. It can simplify the traditional valve combination configuration, and the design that can reduce the dead angle and ensure complete drainage to achieve the effect of sterilization.

Advantage

- Customized specific design.
- Compact design and smaller envelope dimension is achievable for the actuators.
- Combination of many different nominal diameters.
- Optimized drain ability and minimized dead leg.
- Reduction of using fittings, tubing and welding jobs in a system.
- All end connections and materials are available according to the customer's specification.



Code Description

Multi-port type Example : LAV0 - 1.1

L	A	V	0	-	1	1
Main body	Main body tilt angle	Sub-body	Sub-body Angle tilt angle		The location to connect sub-body with main body	Sub-body direction
level = L vertical = V	With tilt angle = A Without tilt angle = 0	Horizontal = H vertical = V	With tilt angle = A Without tilt angle = 0		Left = 1 right = 2	1 = front 2 = behind

Block type Example : LBI90

L	B	I	90
Main run	Diaphragm + main run	Outlet port shape	Outlet port angle
level = L vertical = V U type = U Bending = B	back to back = B not level = O	tilt = A upright = I V type = V Bending = B Horizontal = H	45° = 45 90° = 90

Sample Valve for BPE

UHT Sterilizing & No Residual Others OEM

CSE Sampling Valve product line is specifically designed for taking process samples in breweries, wineries, food and beverage manufacturing facilities, as well as in pharmaceutical, biotechnology, chemical and cosmetic manufacturing to ensure quality, consistency, taste, sterility. Sampling is extremely important at all stages of production, as it allows for trials and analyses and is often the way a potential problem is caught. CSE Sampling Valve has minimal moving parts, simple design, competitive price, and proven cleanliness in process manufacturing.




Hygienic Sample Valve for BPE

Materials:


- Flow area: AISI 316L
- Other steel parts: AISI 316
- Plug stem: AISI 316L
- Gasket for flow area: EPDM/ Silicon/ FKM

Technical data:

- Temperature range: Full vacuum. -10°C to +140°C(EPDM).

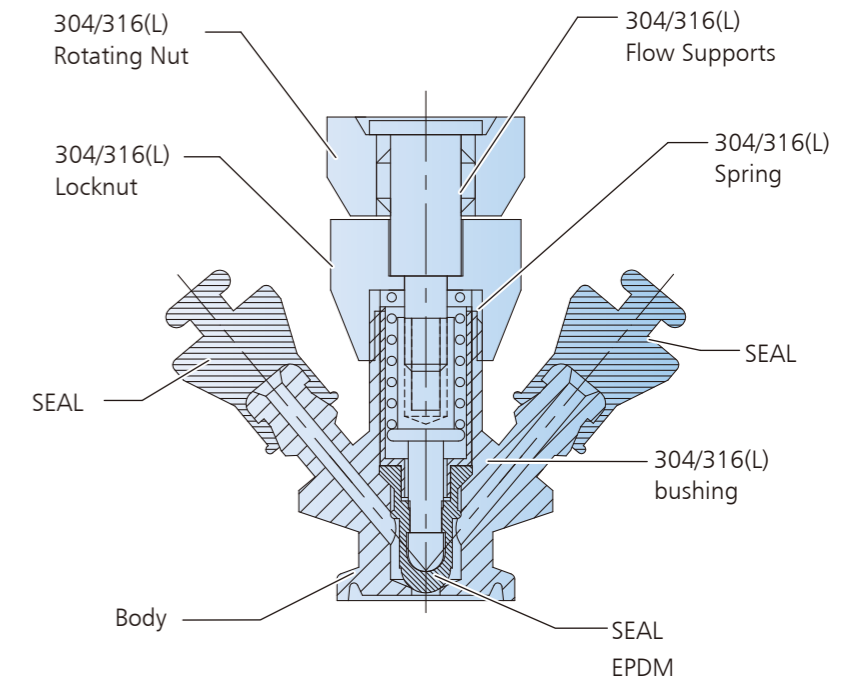


DA Type

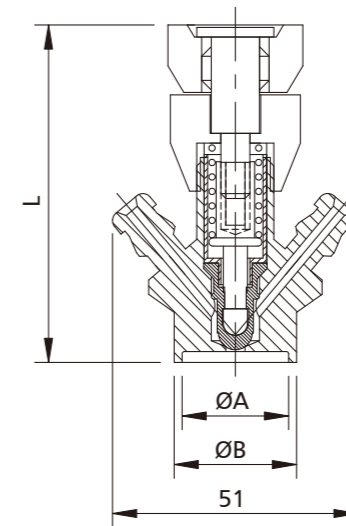

Weld

SIZE	ØA	ØB	L
1/2"	9.4	12.7	71.5
3/4"	15.75	19.05	71.5
1.0"	22.1	25.4	71.5

DB Type

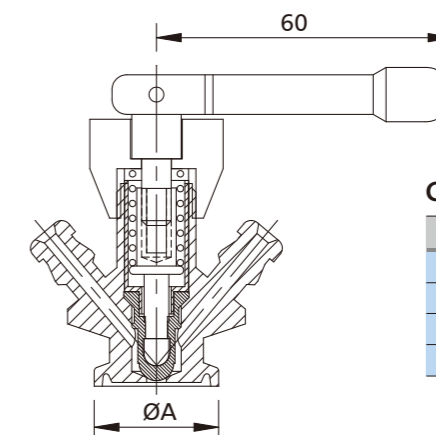


Clamp

SIZE	ØA	L
A37	34	70
1/2"	25.2	70
3/4"	25.2	70
1.0"	50.5	70




CSE Sample Cock Valve

C Type

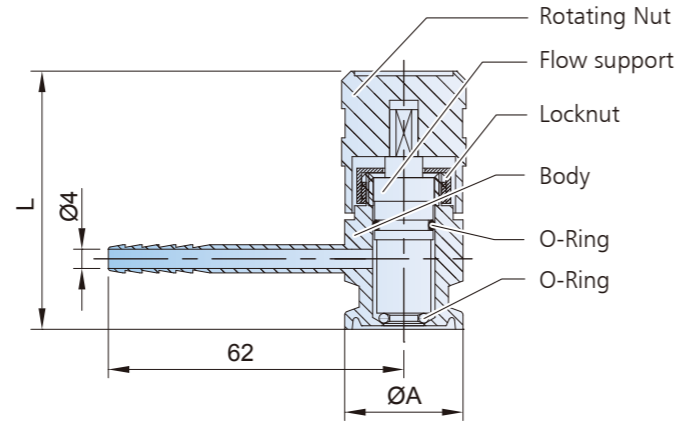


SIZE	ØA	L
1/2"	25.2	70
1"	50.5	70

D Type




F Type




CSE Diaphragm Sample Valve

I Type




L Type



Auto Aseptic Valve & Manual Purity Valve

For Joint any

Tube fitting-3A, SMS, DIN, BS, Elbow, Tee, Reducer
Clamp-Union-Weld/Expanding Ferrule, Clamp, Valve-Butterfly, Check, Sight Glass, Ball Valve with our Orbitol weld Equipment

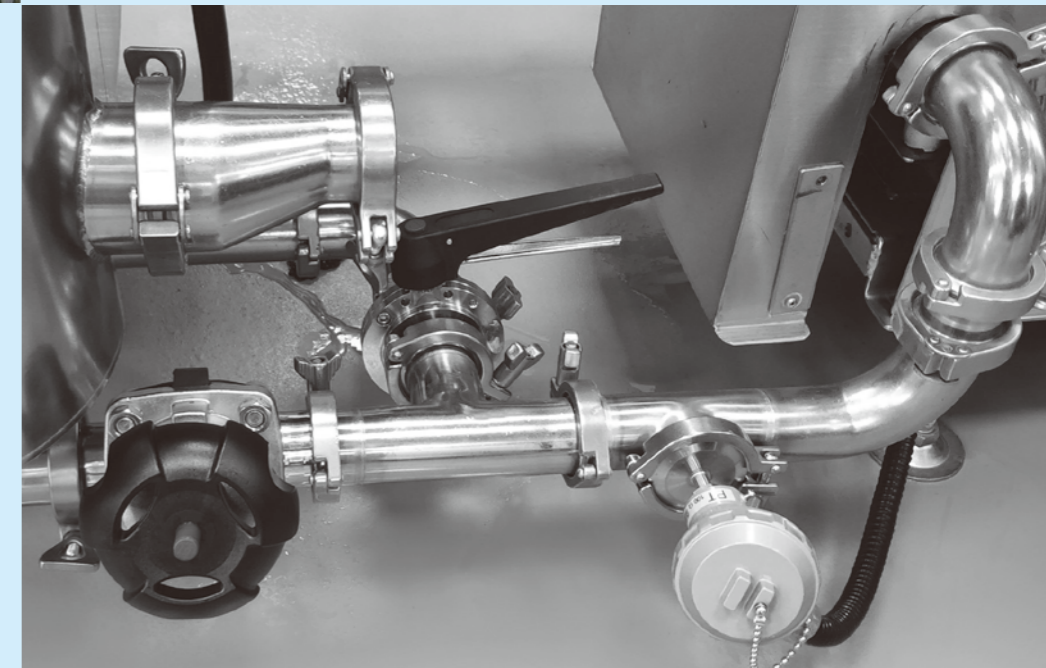

CSE Hygienic Filter & OEM for BPE



OEM series valves



(Mf) Membrane Filter



Mini-filter




Filling Valve



Steam Trap

Bellow Sterile Valves

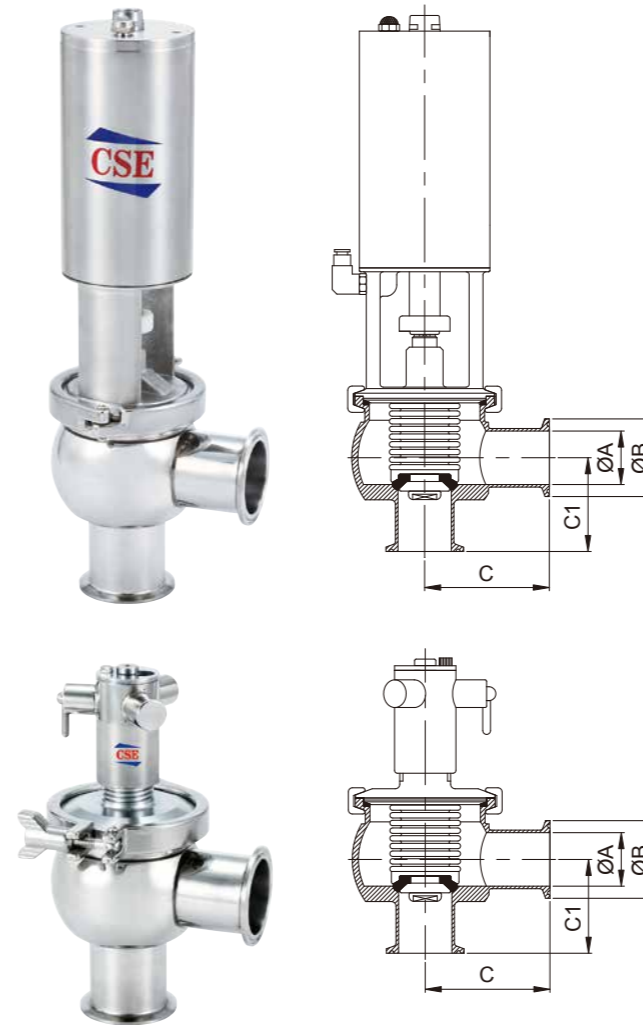


SIZE	ØA	ØB	C	C1
1.0"	22.1	50.5	58.5	50.6
1.5"	34.8	50.5	81.2	61
2.0"	47.5	64	85.7	65.4
2.5"	60.2	77.5	103.1	72.1
3.0"	72.9	91	116.4	79.7



STYPE

Micro-Filter


- Material
Housing: 304/316L
- Connection
Clamp End/Weld End/ IDF Male End
- Surface
ID/OD Mirror Polished

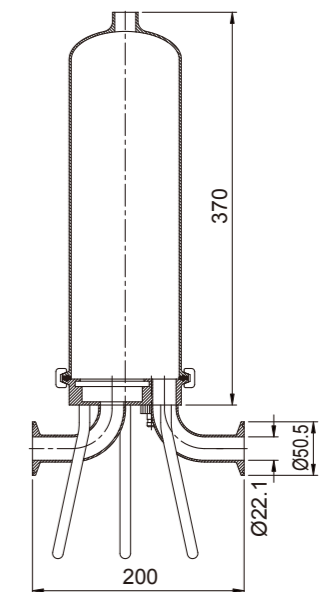

CSE STRAINERS

- Material: SUS304/SUS316L
- Mesh: 20~400
- Aperture Size: 1~10(mm)
- P.D.Press(MPa): 0.05~0.2
- Types: Weld end/ Clamp end/ Male end/ Female end


INLINE STRAINER I TYPE

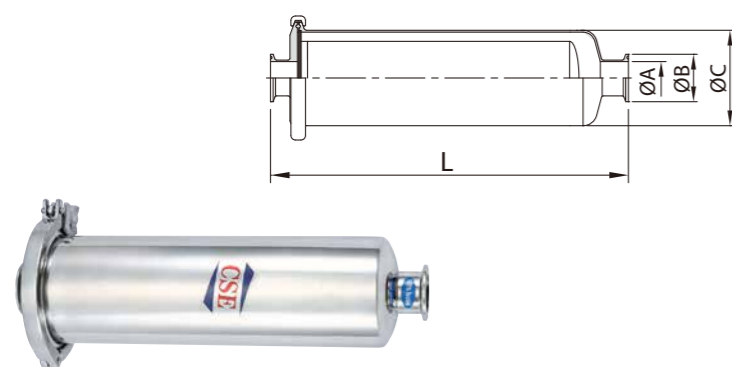

STRAINER INLINE TYPE (I)

SIZE	ØA	ØB	ØC	L
1.0"	22.2	50.5	101.6	380
1.5"	34.8	50.5	101.6	380
2.0"	47.5	64	101.6	380
2.5"	60.2	77.5	101.6	450
3.0"	72.9	91	101.6	550


SIDE OUTLET STRAINER L TYPE

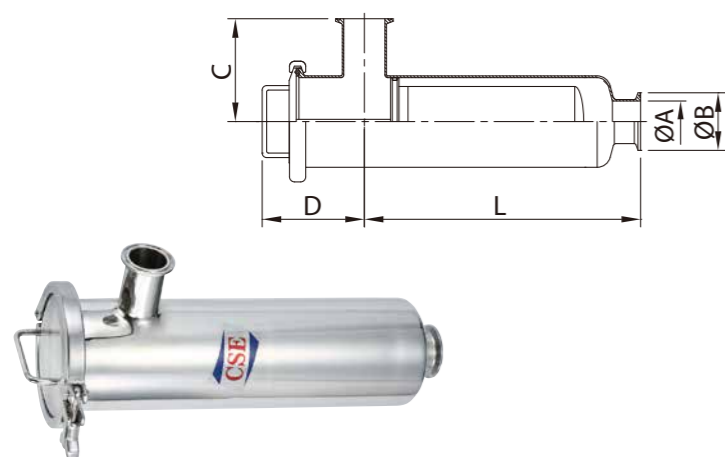

STRAINER SIDE OUTLET TYPE (L)

SIZE	ØA	ØB	C	D	L
1"	22.1	50.5	104.8	110	310
1.5"	34.8	50.5	104.8	110	310
2"	47.5	64	114.3	110	310
2.5"	60.2	77.5	108	110	410
3"	72.9	91	108	110	490

Y TYPE

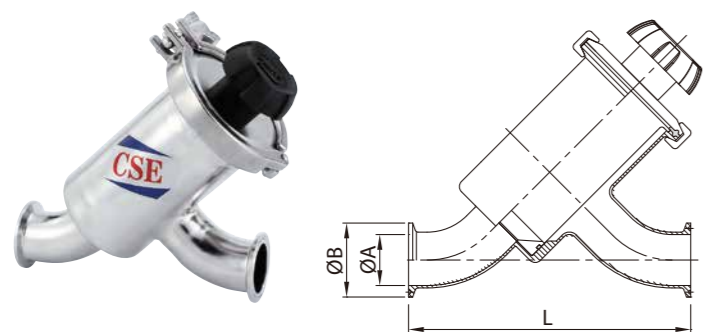


STRAINER Y TYPE

SIZE	ØA	ØB	L
1.0"	22.1	50.5	155.65
1.5"	34.8	50.5	192.63
2.0"	47.5	64	208.17
2.5"	60.2	77.5	271.26
3.0"	72.9	91	300.83

Sanitary Standard Pressure Gauge

Note:

Sanitary pressure gauges are stainless steel products specifically designed to meet the demanding sanitary requirements for food dairy, beverage, pharmaceutical and biotech applications. Complies with 3A sanitary standard, water-proof, shock resistant, and closed structures are durable durable and accurate, good for long time running. All series are liquid-filled, special materials movement and bourdon tube have lasting durability. It is applicable to the places of both strong fluctuation and non-corrosive fluid, such as air, water and oil.

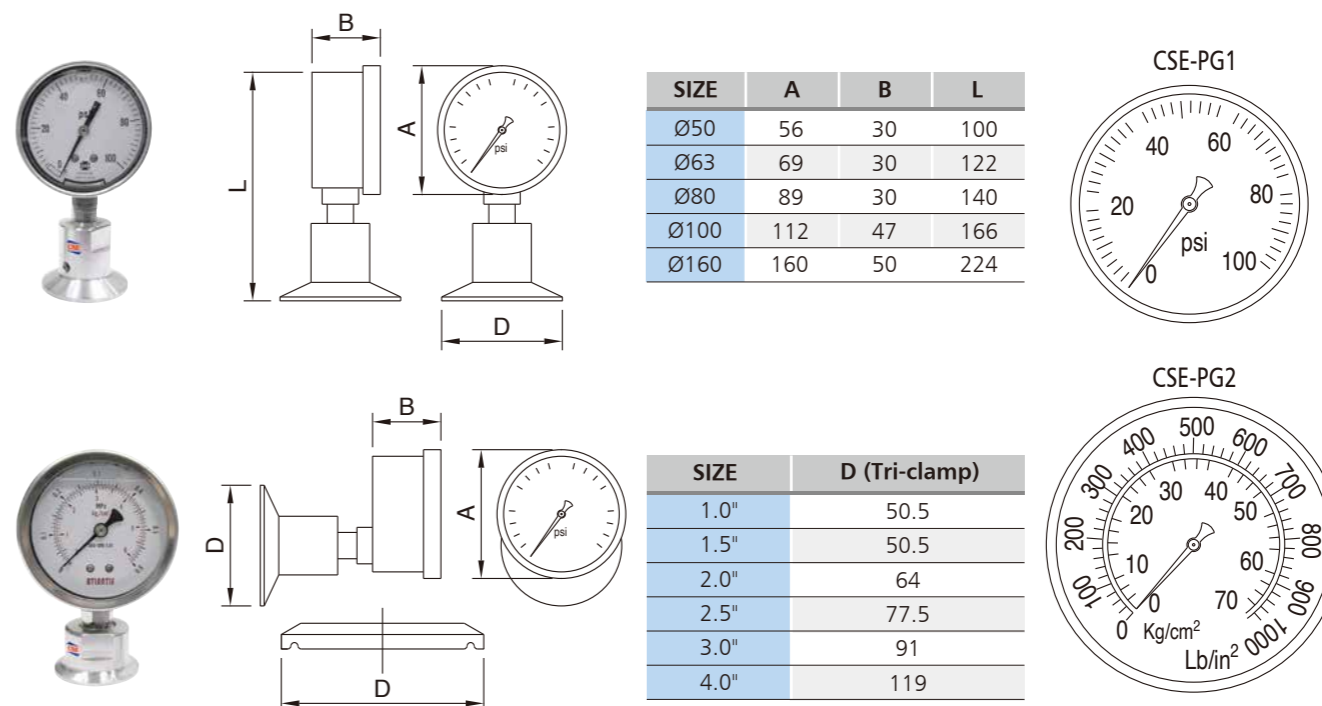

SIZE	A	B	L
Ø50	56	30	100
Ø63	69	30	122
Ø80	89	30	140
Ø100	112	47	166
Ø160	160	50	224

SIZE	D (Tri-clamp)
1.0"	50.5
1.5"	50.5
2.0"	64
2.5"	77.5
3.0"	91
4.0"	119

- Process connection: 1-1/2", 2.0", 2-1/2" Quick-release clamp piping system
- Suitable Pressure Ranges: 15psi to 600psi
- Instrument Connection: 1/4"NPT/BSPT or 1/2"NPT/BSPT
- Case & Movement Material: SS304
- Connection Material: SUS316L


- Diaphragm Material: SUS316L
- Fill Fluid: Glycerined (Vegetable oil)
- Bourdon Tube Material: SUS316L
- Ferrule Material: SUS304/SUS316L
- Lens : Safety Glass
- Max temperature: standard-120°C , special-150°C

Thermometer

CSE-TM-T



CSE-TM-I



- Process connection: 1-1/2" ~ 4" Quick-release clamp piping system
- Case & Movement Material: SS304
- Ferrule Material: SS304/ SUS316
- Lens: Safety Glass

BPE Pharmaceutical / Biotechnology Fitting & Tube

CSE offer series of high capacity product in pharmaceutical flowing control system, we use the special material on BPE welding: low sulphur ASTM SS 316L, $S \leq 0.005\% \sim 0.017\%$ which meets the standard of orbital welding. We also offer electro-polished in ID to satisfy your demands.



CSE HIGH PURITY TUBE & FITTING VALVE (ASME BPE STANDARD)

Pharmaceutical/Biotechnology fitting. CSE have over 15 years hygienic fitting experiences for developing out the ASME bioprocessing equipment (BPE) standard tube, fitting, valve components for high purity application such as water for injection, pharmaceutical, cosmetics use. Material : low sulphur ASTM SS316L, $S : \leq 0.005\% \sim 0.017\%$,



MTR certificate will be offered.

Surface options:

Ra Reading for Tubing

Surface Designation	As drawing and / or mechanically polished		Mechanically Polished and Electropolished or Electropolished		
	Ra Average μ -in	Ra Average μ -m	Surface Designation	Ra Average μ -in	Ra Average μ -m
SF1	20	0.5	SF4	15	0.38
SF2	25	0.63	SF5	20	0.5
SF3	30	0.76	SF6	25	0.63

Ra Reading for Fitting

Surface Designation	Mechanically polished		Mechanically Polished and Electropolished		
	Ra Average μ -in	Ra Average μ -m	Surface Designation	Ra Average μ -in	Ra Average μ -m
SF1	20	0.5	SF4	15	0.38
SF2	25	0.63	SF5	20	0.5
SF3	30	0.76	SF6	25	0.63

Outer surface: Tubes and fittings $Ra \leq 32 \mu\text{in} (0.8 \mu\text{m})$



Dimension & tolerance :

SIZE	OD	Wall thickness		Squareness face To tangent * B	Off angle O	Off plane P
		Mechanical polish	Electropolish			
1/2"	± 0.13	+0.13/-0.2	+0.13/-0.25	0.13	0.36	0.76
3/4"	± 0.13	+0.13/-0.2	+0.13/-0.25	0.13	0.46	0.76
1.0"	± 0.13	+0.13/-0.2	+0.13/-0.25	0.2	0.64	0.76
1.5"	± 0.2	+0.13/-0.2	+0.13/-0.25	0.2	0.86	1.27
2.0"	± 0.2	+0.13/-0.2	+0.13/-0.25	0.2	1.09	1.27
2.5"	± 0.25	+0.13/-0.2	+0.13/-0.25	0.25	1.37	1.27
3.0"	± 0.25	+0.13/-0.2	+0.13/-0.25	0.41	1.73	1.27
4.0"	± 0.38	+0.2/-0.25	+0.2/-0.30	0.41	2.18	1.52

General Notes :

Tolerance on E end-to-end and center-to-end : 1.27mm

Tolerance for centerline radius (CLR) is $\pm 10\%$ of the nominal dimension.

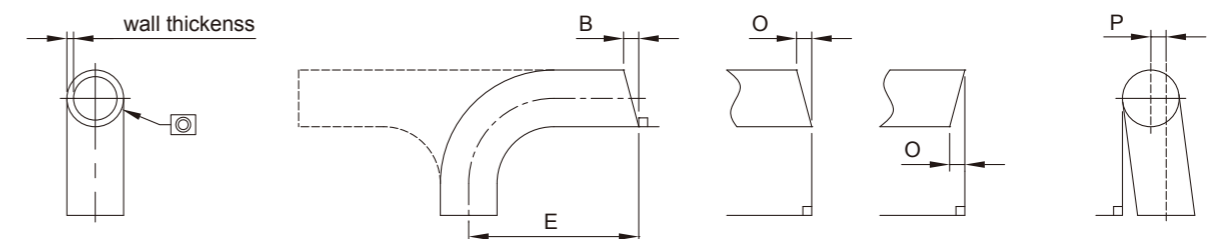

BPE Stainless Steel Tubing

Absolutely hygienic conditions are necessary for the entire production cycle of pharmaceutical and ultra-high industries.

Therefore, tubes, fittings, and valves with a smooth internal surface are extensively installed with the advantages of cleaning easily and avoiding bacteria contamination.

CSE only offers tubes that are manufactured, quality controlled, marked, and certified according to the highest standards for hygienic equipment design and guarantees extended quality and traceability. CSE BPE tubing significantly reduces inspection requirements prior to installation by utilizing only the highest quality stainless steel materials.

CSE delivers directly from stock the following stainless steel tubes in grade TP316L with low sulfur content of 0.005% to 0.0017% and SF1 and SF4 finishes (according to the ASME BPE specification)




STANDARDS:
ASTM A270-2015 S2

SURFACE FINISH: SF0~SF6
SF1 ID Pol. Ra<0.5μm/
OD Pol. Ra<0.8μm
SF4 ID EP Finished Ra<0.38μm/
OD Pol. Ra<0.8μm

CSE BPE EP products with following advantages:

- Homogeneously EP layer to minimize rouging
- Higher chrome concentration for better corrosion resistance
- Guaranteed smoothness of all internal surfaces to reduce Bio film

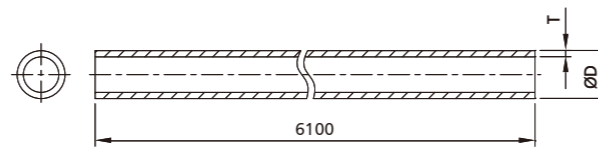

SIZE	ØD	T
1/8"	3.18	0.56
1/4"	6.35	0.89
3/8"	9.53	0.89
1/2"	12.7	1.65
3/4"	19.05	1.65
1.0"	25.4	1.65
1.5"	38.1	1.65
2.0"	50.8	1.65
2.5"	63.5	1.65
3.0"	76.2	1.65
4.0"	101.6	2.11
6.0"	152.4	2.77



Marking

CSE ASME BPE (BPE REFERENCE NO.)
TP316L size SFX
(H.T.NO.)



CSE ASTM A270 TP316L ASME-BPE DT-4-1 SF-X WLD NDE Size X length X Heat NO X

Package Type

SF1




SF4




Survey	O1s	Cr2p3	Fe2p3	Ni2p3	Mo3d	Cr : Fe
1.5" TEE 1810D (sputter 1.5nm)	56.28	19.74	19.02	3.94	1.02	1.04 : 1

1.5" TEE 1810D Depth profile




Note: "-" is shown the value under detection limit of XPS analysis.

BPE Fittings

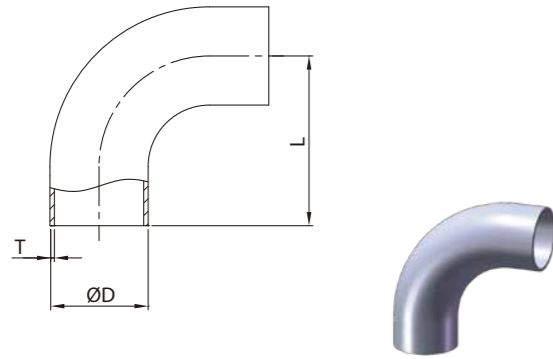


DT-4.1.1-1 LONG WELD 90° ELBOW (DT-7)

SIZE	ØD	L	T
1/2"	12.7	76.2	1.65
3/4"	19.05	76.2	1.65
1"	25.4	76.2	1.65
1.5"	38.1	95.25	1.65
2"	50.8	120.65	1.65
2.5"	63.5	139.7	1.65
3"	76.2	158.75	1.65
4"	101.6	203.2	2.11
6"	152.4	292.1	2.77

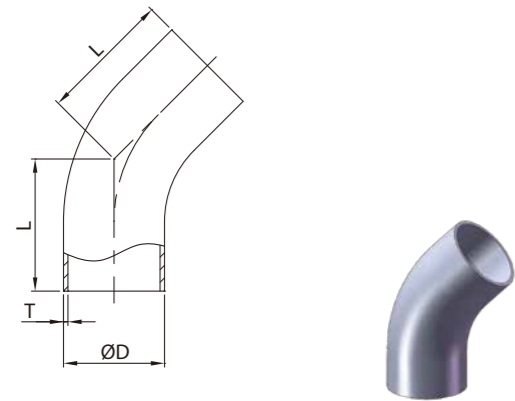


DT-4.1.1-4 LONG 45° ELBOW (DT-8)

SIZE	ØD	L	T
1/2"	12.7	57.15	1.65
3/4"	19.05	57.15	1.65
1"	25.4	57.15	1.65
1.5"	38.1	63.5	1.65
2"	50.8	76.2	1.65
2.5"	63.5	85.73	1.65
3"	76.2	92.08	1.65
4"	101.6	114.3	2.11
6"	152.4	158.75	2.77

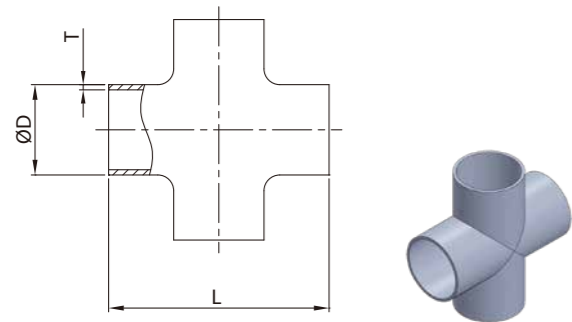


DT-4.1.2-1C CROSS (DT-9)

SIZE	ØD	L	T
1/2"	12.7	95.26	1.65
3/4"	19.05	101.6	1.65
1"	25.4	107.96	1.65
1.5"	38.1	120.66	1.65
2"	50.8	146.06	1.65
2.5"	63.5	158.76	1.65
3"	76.2	171.46	1.65
4"	101.6	209.56	2.11
6"	152.4	285.76	2.77

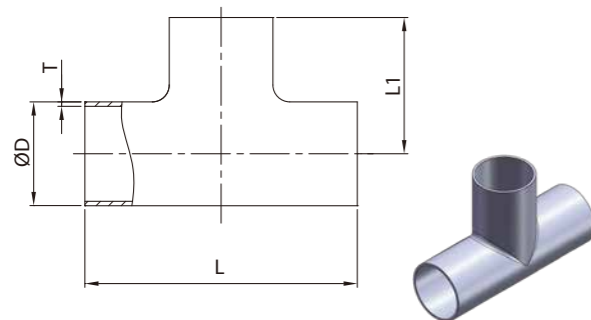


DT-4.1.2-1T TEE (DT-9)

SIZE	ØD	L	L1	T
1/2"	12.7	95.26	47.63	1.65
3/4"	19.05	101.6	50.8	1.65
1"	25.4	107.96	53.98	1.65
1.5"	38.1	120.66	60.33	1.65
2"	50.8	146.06	73.03	1.65
2.5"	63.5	158.76	79.38	1.65
3"	76.2	171.46	85.73	1.65
4"	101.6	209.56	104.78	2.11
6"	152.4	285.76	142.88	2.77


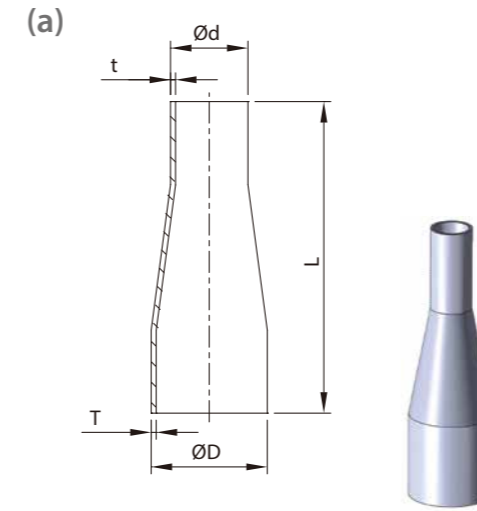


DT-4.1.3-1 CONCENTRIC REDUCER (DT11)

SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	101.6	53.93	1.65	1.65
1.0"×1/2"	25.4	12.7	114.3	63.5	1.65	1.65
1.0"×3/4"	25.4	19.05	101.6	53.93	1.65	1.65
1.5"×1/2"	38.1	12.7	139.7	76.2	1.65	1.65
1.5"×3/4"	38.1	19.05	127	76.2	1.65	1.65
1.5"×1.0"	38.1	25.4	127	63.5	1.65	1.65
2.0"×1/2"	50.8	12.7	196.9	85.73	1.65	1.65
2.0"×3/4"	50.8	19.05	184.2	85.73	1.65	1.65
2.0"×1.0"	50.8	25.4	184.2	85.73	1.65	1.65
2.0"×1.5"	50.8	38.1	133.4	63.5	1.65	1.65
2.5"×1/2"	63.5	12.7	247.7	—	1.65	1.65
2.5"×3/4"	63.5	19.05	235	—	1.65	1.65
2.5"×1.0"	63.5	25.4	235	85.73	1.65	1.65
2.5"×1.5"	63.5	38.1	184.2	85.73	1.65	1.65
2.5"×2.0"	63.5	50.8	139.7	63.5	1.65	1.65
3.0"×1.0"	76.2	25.4	285.8	107.95	1.65	1.65
3.0"×1.5"	76.2	38.1	235	107.95	1.65	1.65
3.0"×2.0"	76.2	50.8	190.5	85.73	1.65	1.65
3.0"×2.5"	76.2	63.5	139.7	66.68	1.65	1.65
4.0"×1.0"	101.6	25.4	393.7	—	2.11	1.65
4.0"×1.5"	101.6	38.1	342.9	—	2.11	1.65
4.0"×2.0"	101.6	50.8	298.5	130.18	2.11	1.65
4.0"×2.5"	101.6	63.5	247.7	107.95	2.11	1.65
4.0"×3.0"	101.6	76.2	196.9	98.43	2.11	1.65
6.0"×3.0"	152.4	76.2	—	184.15	2.77	1.65
6.0"×4.0"	152.4	101.6	254	142.88	2.77	2.11

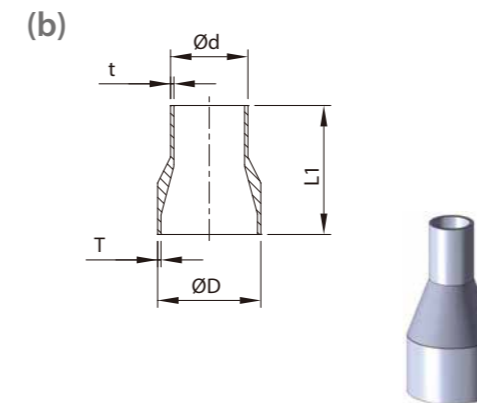


BPE Fittings

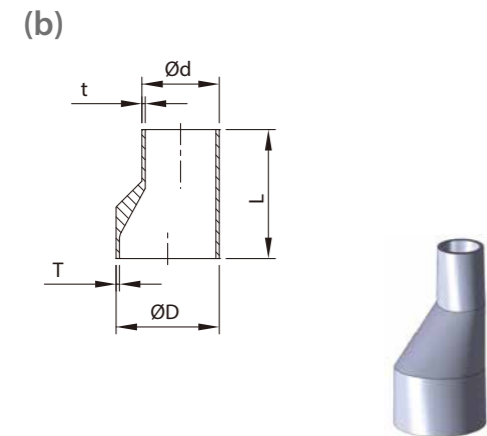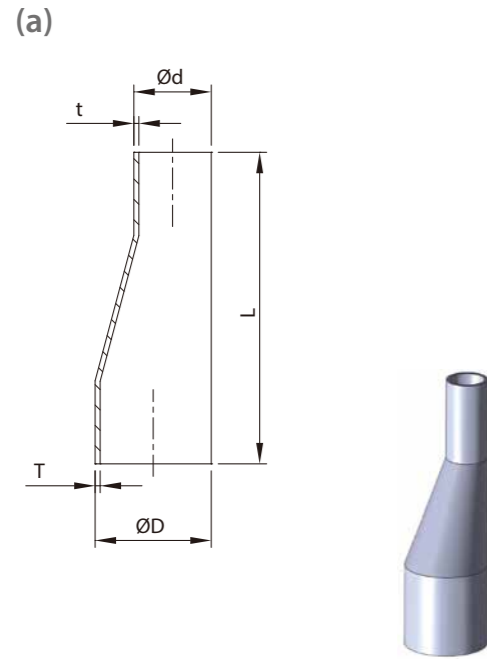


DT-4.1.3-1 ECCENTRIC REDUCER (DT11)

SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	101.6	53.93	1.65	1.65
1.0"×1/2"	25.4	12.7	114.3	63.5	1.65	1.65
1.0"×3/4"	25.4	19.05	101.6	53.93	1.65	1.65
1.5"×1/2"	38.1	12.7	139.7	76.2	1.65	1.65
1.5"×3/4"	38.1	19.05	127	76.2	1.65	1.65
1.5"×1.0"	38.1	25.4	127	63.5	1.65	1.65
2.0"×1/2"	50.8	12.7	196.9	85.73	1.65	1.65
2.0"×3/4"	50.8	19.05	184.2	85.73	1.65	1.65
2.0"×1.0"	50.8	25.4	184.2	85.73	1.65	1.65
2.0"×1.5"	50.8	38.1	133.4	63.5	1.65	1.65
2.5"×1/2"	63.5	12.7	247.7	—	1.65	1.65
2.5"×3/4"	63.5	19.05	235	—	1.65	1.65
2.5"×1.0"	63.5	25.4	235	85.73	1.65	1.65
2.5"×1.5"	63.5	38.1	184.2	85.73	1.65	1.65
2.5"×2.0"	63.5	50.8	139.7	63.5	1.65	1.65
3.0"×1.0"	76.2	25.4	285.8	107.95	1.65	1.65
3.0"×1.5"	76.2	38.1	235	107.95	1.65	1.65
3.0"×2.0"	76.2	50.8	190.5	85.73	1.65	1.65
3.0"×2.5"	76.2	63.5	139.7	66.68	1.65	1.65
4.0"×1.0"	101.6	25.4	393.7	—	2.11	1.65
4.0"×1.5"	101.6	38.1	342.9	—	2.11	1.65
4.0"×2.0"	101.6	50.8	298.5	130.18	2.11	1.65
4.0"×2.5"	101.6	63.5	247.7	107.95	2.11	1.65
4.0"×3.0"	101.6	76.2	196.9	98.43	2.11	1.65
6.0"×3.0"	152.4	76.2	—	184.15	2.77	1.65
6.0"×4.0"	152.4	101.6	254	142.88	2.77	2.11

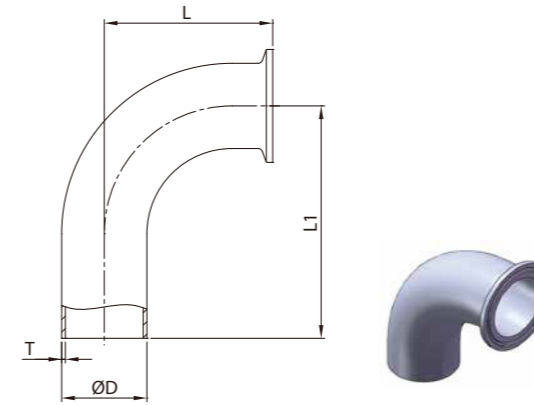


DT-4.1.1-2 90° CLAMP/WELD ELBOW (DT-12)

SIZE	ØD	L	L1	T
1/2"	12.7	41.28	76.2	1.65
3/4"	19.05	41.28	76.2	1.65
1"	25.4	50.8	76.2	1.65
1.5"	38.1	69.85	95.25	1.65
2"	50.8	88.9	120.65	1.65
2.5"	63.5	107.95	139.7	1.65
3"	76.2	127	158.75	1.65
4"	101.6	168.28	203.2	2.11
6"	152.4	266.7	292.1	2.77

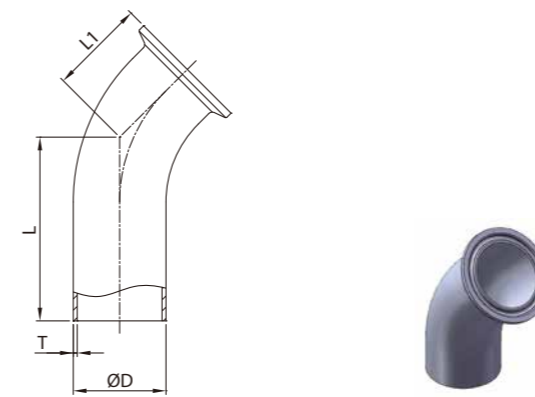


DT-4.1.1-5 45° CLAMP/WELD ELBOW (DT-13)

SIZE	ØD	L	L1	T
1/2"	12.7	57.15	25.4	1.65
3/4"	19.05	57.15	25.4	1.65
1"	25.4	57.15	28.58	1.65
1.5"	38.1	63.5	36.53	1.65
2"	50.8	76.2	44.45	1.65
2.5"	63.5	85.73	52.4	1.65
3"	76.2	92.08	60.33	1.65
4"	101.6	114.3	79.38	2.11
6"	152.4	158.75	133.35	2.77

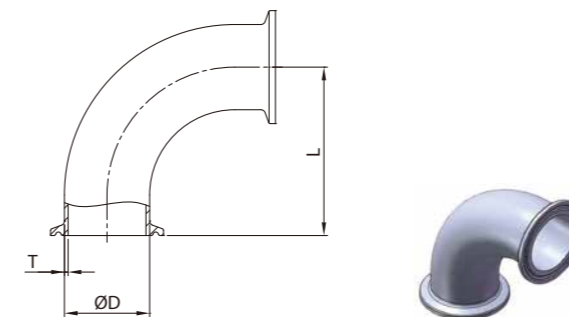

DT-4.1.1-3 90° CLAMP ELBOW (DT-16)


SIZE	ØD	L	T
1/2"	12.7	41.28	1.65
3/4"	19.05	41.28	1.65
1"	25.4	50.8	1.65
1.5"	38.1	69.85	1.65
2"	50.8	88.9	1.65
2.5"	63.5	107.95	1.65
3"	76.2	127	1.65
4"	101.6	168.28	2.11
6"	152.4	266.7	2.77

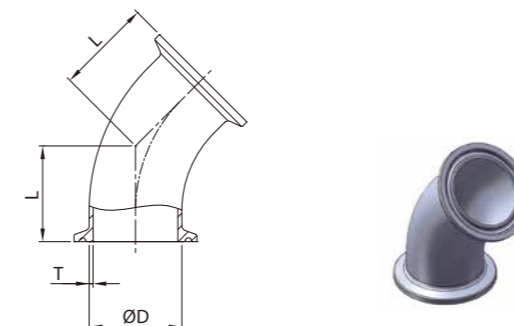

DT-4.1.1-6 45° CLAMP ELBOW (DT-17)


SIZE	ØD	L	T
1/2"	12.7	25.4	1.65
3/4"	19.05	25.4	1.65
1"	25.4	28.58	1.65
1.5"	38.1	36.5	1.65
2"	50.8	44.45	1.65
2.5"	63.5	52.4	1.65
3"	76.2	60.33	1.65
4"	101.6	79.38	2.11
6"	152.4	133.35	2.77

BPE Fittings

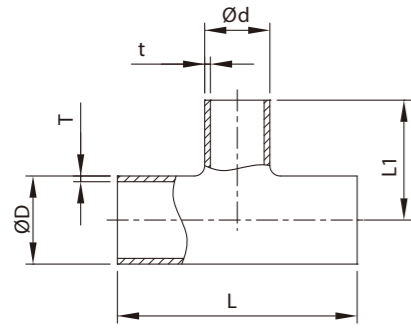

DT-4.1.2-6 REDUCING TEE (DT-10)


SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	101.6	50.8	1.65	1.65
1"×1/2"	25.4	12.7	107.96	53.98	1.65	1.65
1"×3/4"	25.4	19.05	107.96	53.98	1.65	1.65
1.5"×1/2"	38.1	12.7	120.66	60.33	1.65	1.65
1.5"×3/4"	38.1	19.05	120.66	60.33	1.65	1.65
1.5"×1"	38.1	25.4	120.66	60.33	1.65	1.65
2"×1/2"	50.8	12.7	146.06	66.68	1.65	1.65
2"×3/4"	50.8	19.05	146.06	66.68	1.65	1.65
2"×1"	50.8	25.4	146.06	66.68	1.65	1.65
2"×1.5"	50.8	38.1	146.06	66.68	1.65	1.65
2.5"×1/2"	63.5	12.7	158.76	73.03	1.65	1.65
2.5"×3/4"	63.5	19.05	158.76	73.03	1.65	1.65
2.5"×1"	63.5	25.4	158.76	73.03	1.65	1.65
2.5"×1.5"	63.5	38.1	158.76	73.03	1.65	1.65
2.5"×2"	63.5	50.8	158.76	73.03	1.65	1.65
3"×1/2"	76.2	12.7	171.46	79.38	1.65	1.65
3"×3/4"	76.2	19.05	171.46	79.38	1.65	1.65
3"×1"	76.2	25.4	171.46	79.38	1.65	1.65
3"×1.5"	76.2	38.1	171.46	79.38	1.65	1.65
3"×2"	76.2	50.8	171.46	79.38	1.65	1.65
3"×2.5"	76.2	63.5	171.46	79.38	1.65	1.65
4"×1/2"	101.6	12.7	209.56	92.08	2.11	1.65
4"×3/4"	101.6	19.05	209.56	92.08	2.11	1.65
4"×1"	101.6	25.4	209.56	92.08	2.11	1.65
4"×1.5"	101.6	38.1	209.56	92.08	2.11	1.65
4"×2"	101.6	50.8	209.56	98.43	2.11	1.65
4"×2.5"	101.6	63.5	209.56	98.43	2.11	1.65
4"×3"	101.6	76.2	209.56	98.43	2.11	1.65
6"×3"	152.4	76.2	285.76	123.83	2.77	1.65
6"×4"	152.4	101.6	285.76	130.18	2.77	2.11

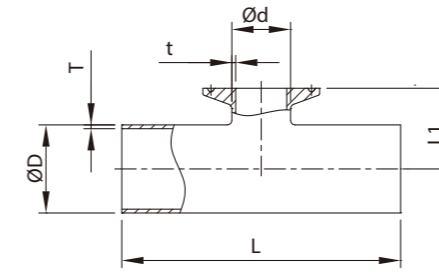

DT-4.1.2-7 SHORT OUTLET W/C REDUCING TEE (DT-14)


SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	101.6	25.4	1.65	1.65
1"×1/2"	25.4	12.7	107.96	28.58	1.65	1.65
1"×3/4"	25.4	19.05	107.96	28.58	1.65	1.65
1.5"×1/2"	38.1	12.7	120.66	34.93	1.65	1.65
1.5"×3/4"	38.1	19.05	120.66	34.93	1.65	1.65
1.5"×1"	38.1	25.4	120.66	34.93	1.65	1.65
2"×1/2"	50.8	12.7	146.06	41.28	1.65	1.65
2"×3/4"	50.8	19.05	146.06	41.28	1.65	1.65
2"×1"	50.8	25.4	146.06	41.28	1.65	1.65
2"×1.5"	50.8	38.1	146.06	41.28	1.65	1.65
2.5"×1/2"	63.5	12.7	158.76	47.63	1.65	1.65
2.5"×3/4"	63.5	19.05	158.76	47.63	1.65	1.65
2.5"×1"	63.5	25.4	158.76	47.63	1.65	1.65
2.5"×1.5"	63.5	38.1	158.76	47.63	1.65	1.65
2.5"×2"	63.5	50.8	158.76	47.63	1.65	1.65
3"×1/2"	76.2	12.7	171.46	53.98	1.65	1.65
3"×3/4"	76.2	19.05	171.46	53.98	1.65	1.65
3"×1"	76.2	25.4	171.46	53.98	1.65	1.65
3"×1.5"	76.2	38.1	171.46	53.98	1.65	1.65
3"×2"	76.2	50.8	171.46	53.98	1.65	1.65
3"×2.5"	76.2	63.5	171.46	53.98	1.65	1.65
4"×1/2"	101.6	12.7	209.56	66.68	2.11	1.65
4"×3/4"	101.6	19.05	209.56	66.68	2.11	1.65
4"×1"	101.6	25.4	209.56	66.68	2.11	1.65
4"×1.5"	101.6	38.1	209.56	66.68	2.11	1.65
4"×2"	101.6	50.8	209.56	66.68	2.11	1.65
4"×2.5"	101.6	63.5	209.56	66.68	2.11	1.65
4"×3"	101.6	76.2	209.56	66.68	2.11	1.65
6"×1/2"	152.4	12.7	285.76	92.08	2.77	1.65
6"×3/4"	152.4	19.05	285.76	92.08	2.77	1.65
6"×1"	152.4	25.4	285.76	92.08	2.77	1.65
6"×1.5"	152.4	38.1	285.76	92.08	2.77	1.65
6"×2"	152.4	50.8	285.76	92.08	2.77	1.65
6"×2.5"	152.4	63.5	285.76	92.08	2.77	1.65
6"×3"	152.4	76.2	285.76	92.08	2.77	1.65
6"×4"	152.4	101.6	285.76	92.25	2.77	2.11

BPE Fittings

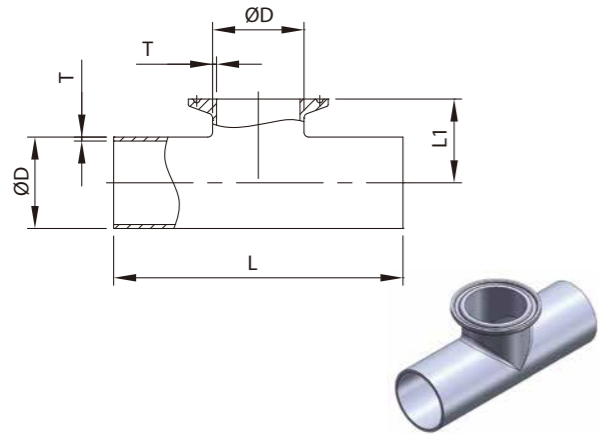


DT-4.1.2-2 EQUAL OUTLET WELD/CLAMP TEE (DT-15)

SIZE	ØD	L	L1	T
1/2"	12.7	95.26	25.4	1.65
3/4"	19.05	101.6	28.58	1.65
1"	25.4	107.96	28.59	1.65
1.5"	38.1	120.66	34.39	1.65
2"	50.8	146.06	41.28	1.65
2.5"	63.5	158.76	47.63	1.65
3"	76.2	171.46	53.98	1.65
4"	101.6	209.56	69.85	2.11
6"	152.4	285.76	117.48	2.77

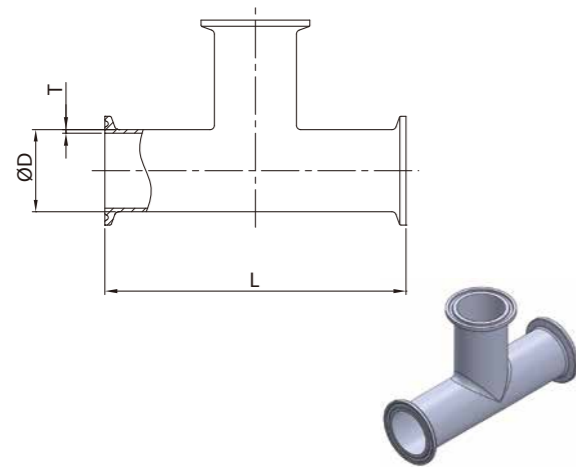


DT-4.1.2-4T CLAMP TEE (DT-18)

SIZE	ØD	L	T
1/2"	12.7	114.3	1.65
3/4"	19.05	120.66	1.65
1"	25.4	133.36	1.65
1.5"	38.1	146.06	1.65
2"	50.8	171.46	1.65
2.5"	63.5	184.16	1.65
3"	76.2	196.86	1.65
4"	101.6	241.3	2.11
6"	152.4	361.96	2.77

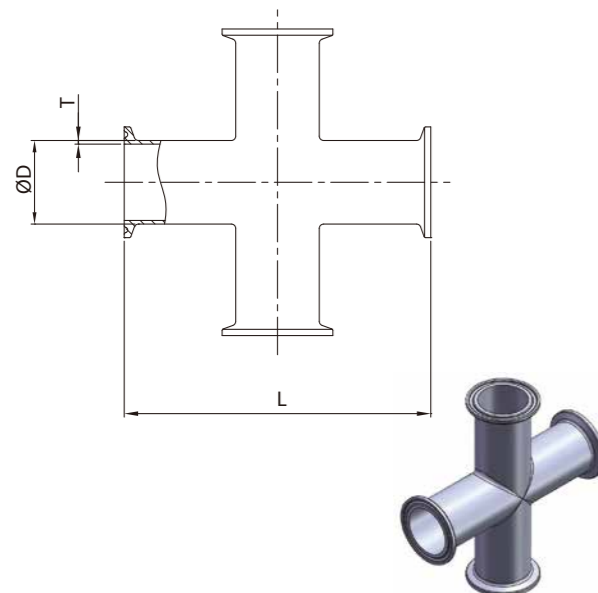

DT-4.1.2-4C CLAMP CROSS (DT-18)

SIZE	ØD	L	T
1/2"	12.7	114.3	1.65
3/4"	19.05	120.66	1.65
1"	25.4	133.36	1.65
1.5"	38.1	146.06	1.65
2"	50.8	171.46	1.65
2.5"	63.5	184.16	1.65
3"	76.2	196.86	1.65
4"	101.6	241.3	2.11
6"	152.4	361.96	2.77

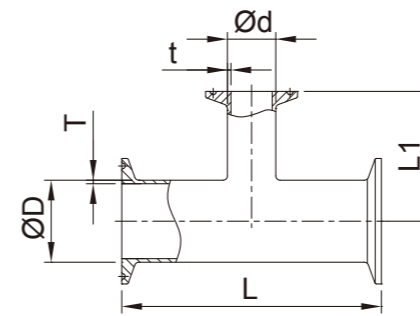


DT-4.1.2-8 REDUCING TEE CLAMP END (DT-19)

SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	127	63.5	1.65	1.65
1.0"×1/2"	25.4	12.7	133.36	66.68	1.65	1.65
1.0"×3/4"	25.4	19.05	133.36	66.68	1.65	1.65
1.5"×1/2"	38.1	12.7	146.06	73.03	1.65	1.65
1.5"×3/4"	38.1	19.05	146.06	73.03	1.65	1.65
1.5"×1.0"	38.1	25.4	146.06	73.03	1.65	1.65
2.0"×1/2"	50.8	12.7	171.46	79.38	1.65	1.65
2.0"×3/4"	50.8	19.05	171.46	79.38	1.65	1.65
2.0"×1.0"	50.8	25.4	171.46	79.38	1.65	1.65
2.0"×1.5"	50.8	38.1	171.46	79.38	1.65	1.65
2.5"×1/2"	63.5	12.7	184.16	85.73	1.65	1.65
2.5"×3/4"	63.5	19.05	184.16	85.73	1.65	1.65
2.5"×1.0"	63.5	25.4	184.16	85.73	1.65	1.65
2.5"×1.5"	63.5	38.1	184.16	85.73	1.65	1.65
2.5"×2.0"	63.5	50.8	184.16	85.73	1.65	1.65
3.0"×1/2"	76.2	12.7	196.86	92.08	1.65	1.65
3.0"×3/4"	76.2	19.05	196.86	92.08	1.65	1.65
3.0"×1.0"	76.2	25.4	196.86	92.08	1.65	1.65
3.0"×1.5"	76.2	38.1	196.86	92.08	1.65	1.65
3.0"×2.0"	76.2	50.8	196.86	92.08	1.65	1.65
3.0"×2.5"	76.2	63.5	196.86	92.08	1.65	1.65
4.0"×1/2"	101.6	12.7	241.3	104.78	2.11	1.65
4.0"×3/4"	101.6	19.05	241.3	104.78	2.11	1.65
4.0"×1.0"	101.6	25.4	241.3	104.78	2.11	1.65
4.0"×1.5"	101.6	38.1	241.3	104.78	2.11	1.65
4.0"×2.0"	101.6	50.8	241.3	111.13	2.11	1.65
4.0"×2.5"	101.6	63.5	241.3	111.13	2.11	1.65
4.0"×3.0"	101.6	76.2	241.3	111.13	2.11	1.65
6.0"×3.0"	152.4	76.2	361.96	136.53	2.77	1.65
6.0"×4.0"	152.4	101.6	361.96	146.05	2.77	2.11

BPE Fittings


DT-4.1.2-9 REDUCING TEE CLAMP END (DT-20)

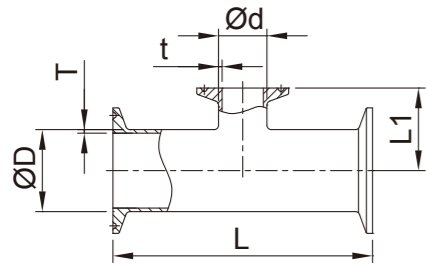


SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	127	25.4	1.65	1.65
1.0"×1/2"	25.4	12.7	133.36	28.58	1.65	1.65
1.0"×3/4"	25.4	19.05	133.36	28.58	1.65	1.65
1.5"×1/2"	38.1	12.7	146.06	34.93	1.65	1.65
1.5"×3/4"	38.1	19.05	146.06	34.93	1.65	1.65
1.5"×1.0"	38.1	25.4	146.06	34.93	1.65	1.65
2.0"×1/2"	50.8	12.7	171.46	41.28	1.65	1.65
2.0"×3/4"	50.8	19.05	171.46	41.28	1.65	1.65
2.0"×1.0"	50.8	25.4	171.46	41.28	1.65	1.65
2.0"×1.5"	50.8	38.1	171.46	41.28	1.65	1.65
2.5"×1/2"	63.5	12.7	184.16	47.63	1.65	1.65
2.5"×3/4"	63.5	19.05	184.16	47.63	1.65	1.65
2.5"×1.0"	63.5	25.4	184.16	47.63	1.65	1.65
2.5"×1.5"	63.5	38.1	184.16	47.63	1.65	1.65
2.5"×2.0"	63.5	50.8	184.16	47.63	1.65	1.65
3.0"×1/2"	76.2	12.7	196.86	53.98	1.65	1.65
3.0"×3/4"	76.2	19.05	196.86	53.98	1.65	1.65
3.0"×1.0"	76.2	25.4	196.86	53.98	1.65	1.65
3.0"×1.5"	76.2	38.1	196.86	53.98	1.65	1.65
3.0"×2.0"	76.2	50.8	196.86	53.98	1.65	1.65
3.0"×2.5"	76.2	63.5	196.86	53.98	1.65	1.65
4.0"×1/2"	101.6	12.7	241.3	66.68	2.11	1.65
4.0"×3/4"	101.6	19.05	241.3	66.68	2.11	1.65
4.0"×1.0"	101.6	25.4	241.3	66.68	2.11	1.65
4.0"×1.5"	101.6	38.1	241.3	66.68	2.11	1.65
4.0"×2.0"	101.6	50.8	241.3	66.68	2.11	1.65
4.0"×2.5"	101.6	63.5	241.3	66.68	2.11	1.65
4.0"×3.0"	101.6	76.2	241.3	66.68	2.11	1.65
6.0"×1/2"	152.4	12.7	361.96	92.08	2.77	1.65
6.0"×3/4"	152.4	19.05	361.96	92.08	2.77	1.65
6.0"×1.0"	152.4	25.4	361.96	92.08	2.77	1.65
6.0"×1.5"	152.4	38.1	361.96	92.08	2.77	1.65
6.0"×2.0"	152.4	50.8	361.96	92.08	2.77	1.65
6.0"×2.5"	152.4	63.5	361.96	92.08	2.77	1.65
6.0"×3.0"	152.4	76.2	361.96	92.08	2.77	1.65
6.0"×4.0"	152.4	101.6	361.96	95.25	2.77	2.11

DT-4.1.3-3 CLAMP CONCENTRIC REDUCER (DT-21)

(a)

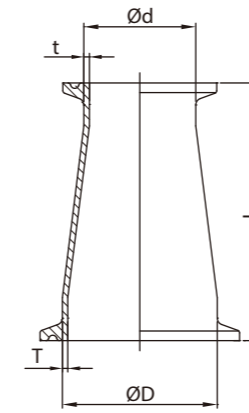


(b)



SIZE	ØD	Ød	L	T	t	L2
3/4"×1/2"	19.05	12.7	50.8	1.65	1.65	79.38
1"×1/2"	25.4	12.7	63.5	1.65	1.65	88.9
1"×3/4"	25.4	19.05	50.8	1.65	1.65	79.38
1.5"×1/2"	38.1	12.7	88.9	1.65	1.65	101.6
1.5"×3/4"	38.1	19.05	76.2	1.65	1.65	101.6
1.5"×1"	38.1	25.4	76.2	1.65	1.65	88.9
2"×1/2"	50.8	12.7	139.7	1.65	1.65	111.13
2"×3/4"	50.8	19.05	127	1.65	1.65	111.13
2"×1"	50.8	25.4	127	1.65	1.65	111.13
2"×1.5"	50.8	38.1	76.2	1.65	1.65	88.9
2.5"×1/2"	63.5	12.7	190.5	1.65	1.65	—
2.5"×3/4"	63.5	19.05	177.8	1.65	1.65	—
2.5"×1"	63.5	25.4	177.8	1.65	1.65	111.13
2.5"×1.5"	63.5	38.1	127	1.65	1.65	111.13
2.5"×2"	63.5	50.8	76.2	1.65	1.65	88.9
3"×1"	76.2	25.4	288.6	1.65	1.65	133.35
3"×1.5"	76.2	38.1	117.8	1.65	1.65	133.35
3"×2"	76.2	50.8	127	1.65	1.65	111.13
3"×2.5"	76.2	63.5	76.2	1.65	1.65	92.08
4"×1"	101.6	25.4	333.4	2.11	1.65	—
4"×1.5"	101.6	38.1	282.6	2.11	1.65	—
4"×2"	101.6	50.8	231.8	2.11	1.65	158.75
4"×2.5"	101.6	63.5	181	2.11	1.65	136.53
4"×3"	101.6	76.2	130.2	2.11	2.1	127
6"×3"	152.4	76.2	—	2.77	1.65	215.9
6"×4"	152.4	101.6	193.7	2.77	2.11	177.8

BPE Fittings


(a)

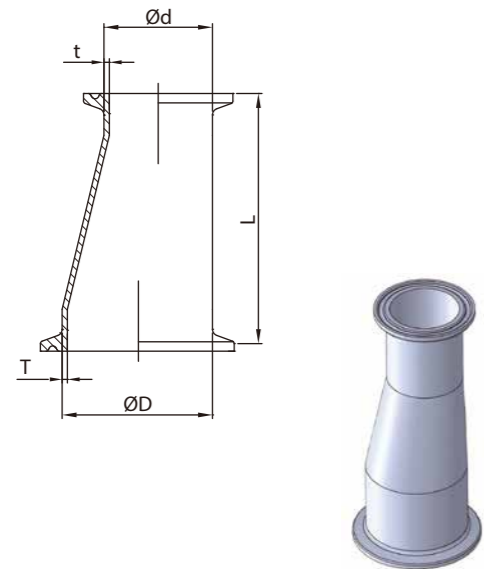

DT-4.1.3-3 CLAMP ECCENTRIC REDUCER (DT-21)


SIZE	$\varnothing D$	$\varnothing d$	L	T	t	L2
3/4"×1/2"	19.05	12.7	50.8	1.65	1.65	79.38
1"×1/2"	25.4	12.7	63.5	1.65	1.65	88.9
1"×3/4"	25.4	19.05	50.8	1.65	1.65	79.38
1.5"×1/2"	38.1	12.7	88.9	1.65	1.65	101.6
1.5"×3/4"	38.1	19.05	76.2	1.65	1.65	101.6
1.5"×1"	38.1	25.4	76.2	1.65	1.65	88.9
2"×1/2"	50.8	12.7	139.7	1.65	1.65	111.13
2"×3/4"	50.8	19.05	127	1.65	1.65	111.13
2"×1"	50.8	25.4	127	1.65	1.65	111.13
2"×1.5"	50.8	38.1	76.2	1.65	1.65	88.9
2.5"×1/2"	63.5	12.7	190.5	1.65	1.65	—
2.5"×3/4"	63.5	19.05	177.8	1.65	1.65	—
2.5"×1"	63.5	25.4	177.8	1.65	1.65	111.13
2.5"×1.5"	63.5	38.1	127	1.65	1.65	111.13
2.5"×2"	63.5	50.8	76.2	1.65	1.65	88.9
3"×1"	76.2	25.4	288.6	1.65	1.65	133.35
3"×1.5"	76.2	38.1	117.8	1.65	1.65	133.35
3"×2"	76.2	50.8	127	1.65	1.65	111.13
3"×2.5"	76.2	63.5	76.2	1.65	1.65	92.08
4"×1"	101.6	25.4	333.4	2.11	1.65	—
4"×1.5"	101.6	38.1	282.6	2.11	1.65	—
4"×2"	101.6	50.8	231.8	2.11	1.65	158.75
4"×2.5"	101.6	63.5	181	2.11	1.65	136.53
4"×3"	101.6	76.2	130.2	2.11	2.11	127
6"×3"	152.4	76.2	—	2.77	1.65	215.9
6"×4"	152.4	101.6	193.7	2.77	2.11	177.8

(b)

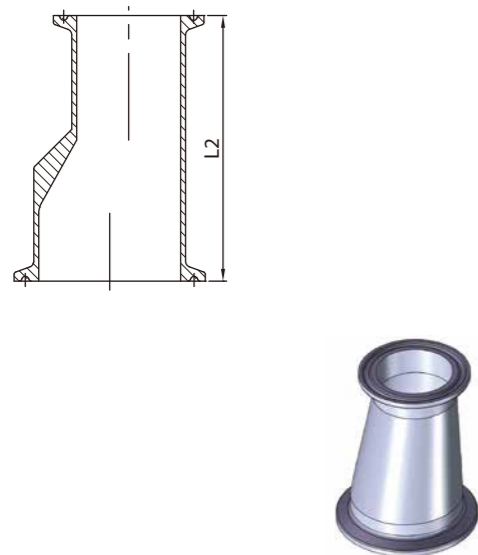

(Type A)

1/2"~1"

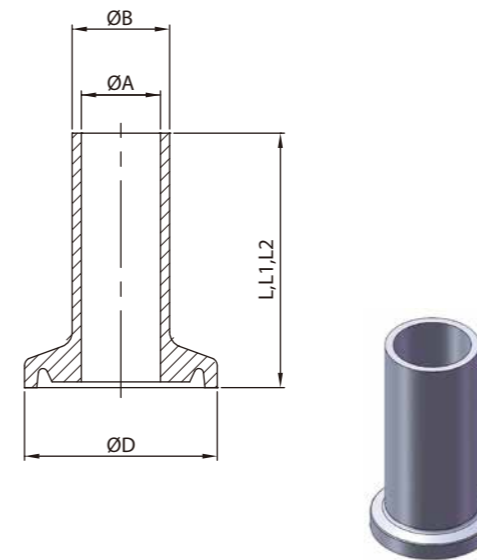


DT-4.1.4-1 WELD FERRULE (DT-22)


TYPE	SIZE	$\varnothing A$	$\varnothing B$	$\varnothing D$	L	L1	L2
A	1/4"	4.57	6.35	25	12.7	28.58	44.45
	3/8"	7.75	9.53	25	12.7	28.58	44.45
	1/2"	9.4	12.7	25	12.7	28.58	44.45
	3/4"	15.75	19.05	25	12.7	28.58	44.45
	1.0"	22.1	25.4	34	12.7	28.58	44.45
B	1.0"	22.1	25.4	50.39	12.7	28.58	44.45
	1.5"	34.8	38.1	50.39	12.7	28.58	44.45
	2.0"	47.5	50.8	63.91	12.7	28.58	57.15
	2.5"	60.2	63.5	77.39	12.7	28.58	57.15
	3.0"	72.9	76.2	90.91	12.7	28.58	57.15
	4.0"	97.38	101.6	118.92	15.88	28.58	57.15
6.0"	146.86	152.4	166.88	19.05	38.1	76.2	

(Type B)

1"~6"

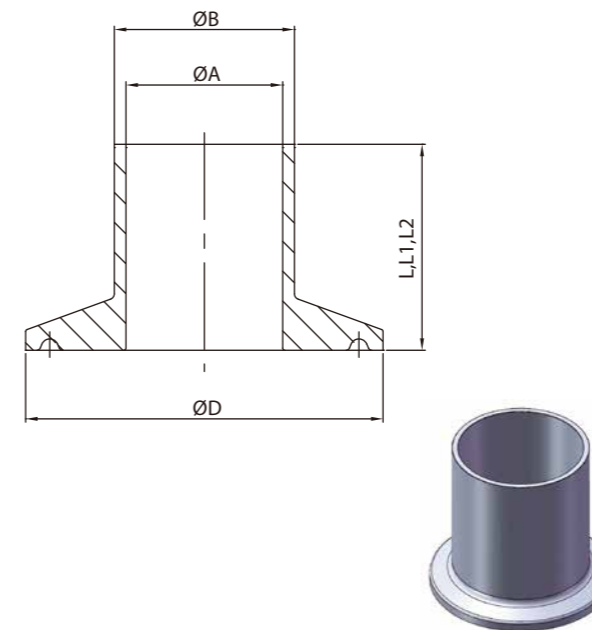


BPE Fittings

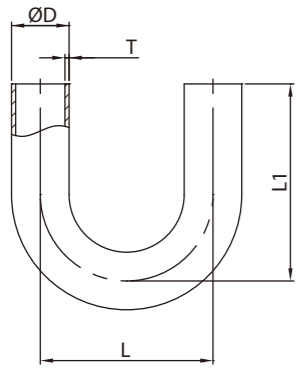


DT-4.1.1-7 180° WELD ELBOW (DT-23)

SIZE	ØD	L	L1	T
1/2"	12.7	114.3	76.2	1.65
3/4"	19.05	114.3	76.2	1.65
1"	25.4	76.2	76.2	1.65
1.5"	38.1	114.3	114.3	1.65
2"	50.8	152.4	127	1.65
2.5"	63.5	190.5	146.05	1.65
3"	76.2	228.6	165.1	1.65
4"	101.6	304.8	215.9	2.11
6"	152.4	457.2	292.1	2.77

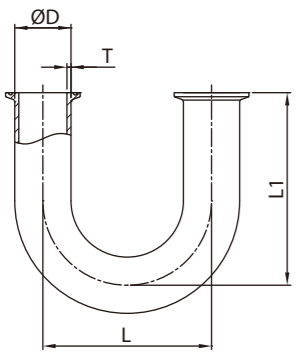


DT-4.1.1-8 180° CLAMP ELBOW (DT-24)

SIZE	ØD	L	L1	T
1/2"	12.7	114.3	88.9	1.65
3/4"	19.05	114.3	88.9	1.65
1"	25.4	76.2	88.9	1.65
1.5"	38.1	114.3	127	1.65
2"	50.8	152.4	139.7	1.65
2.5"	63.5	190.5	158.78	1.65
3"	76.2	228.6	177.8	1.65
4"	101.6	304.8	231.78	2.11
6"	152.4	457.2	330.2	2.77





DT-4.1.2-3 SHORT OUTLET RUN WELD/CLAMP TEE (DT-25)

SIZE	ØD	L	L1	T
1/2"	12.7	47.63	22.23	1.65
3/4"	19.05	50.8	25.4	1.65
1"	25.4	53.98	28.58	1.65
1.5"	38.1	60.33	34.93	1.65
2"	50.8	73.03	41.28	1.65
2.5"	63.5	79.38	47.63	1.65
3"	76.2	85.73	53.98	1.65
4"	101.6	104.78	69.85	2.11
6"	152.4	142.88	117.48	2.77

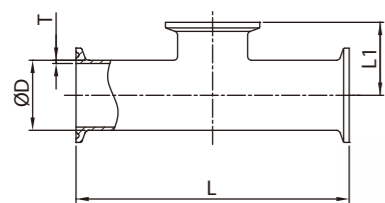




DT-4.1.2-5 SHORT OUTLET TEE CLAMP END (DT-27)

SIZE	ØD	L	L1	T
1/2"	12.7	114.3	25.4	1.65
3/4"	19.05	120.66	28.58	1.65
1"	25.4	133.36	28.58	1.65
1.5"	38.1	146.06	34.93	1.65
2"	50.8	171.46	41.28	1.65
2.5"	63.5	184.16	47.63	1.65
3"	76.2	196.86	53.98	1.65
4"	101.6	241.3	69.85	2.11
6"	152.4	361.96	117.48	2.77

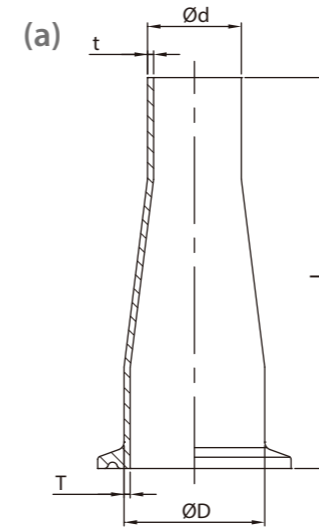

DT-4.1.3-2AC CONCENTRIC REDUCER (DT-26)

SIZE	ØD	Ød	T	t	L	L1
3/4"×1/2"	19.05	12.7	1.65	1.65	76.2	66.68
1"×1/2"	25.4	12.7	1.65	1.65	88.9	76.2
1"×3/4"	25.4	19.05	1.65	1.65	76.2	66.68
1.5"×1/2"	38.1	12.7	1.65	1.65	—	88.9
1.5"×3/4"	38.1	19.05	1.65	1.65	101.6	88.9
1.5"×1"	38.1	25.4	1.65	1.65	101.6	76.2
2"×1/2"	50.8	12.7	1.65	1.65	—	98.43
2"×3/4"	50.8	19.05	1.65	1.65	—	98.43
2"×1"	50.8	25.4	1.65	1.65	152.4	98.43
2"×1.5"	50.8	38.1	1.65	1.65	101.6	76.2
2.5"×1"	63.5	25.4	1.65	1.65	—	98.43
2.5"×1.5"	63.5	38.1	1.65	1.65	152.4	98.43
2.5"×2"	63.5	50.8	1.65	1.65	107.9	76.2
3"×1"	76.2	25.4	1.65	1.65	—	120.65
3"×1.5"	76.2	38.1	1.65	1.65	203.2	120.65
3"×2"	76.2	50.8	1.65	1.65	158.8	98.43
3"×2.5"	76.2	63.5	1.65	1.65	108	79.38
4"×2"	101.6	50.8	2.11	1.65	263.5	146.05
4"×2.5"	101.6	63.5	2.11	1.65	212.7	123.83
4"×3"	101.6	76.2	2.11	1.65	161.9	114.3
6"×3"	152.4	76.2	2.77	2.77	228.6	203.2
6"×4"	152.4	101.6	2.77	2.77	228.6	161.93


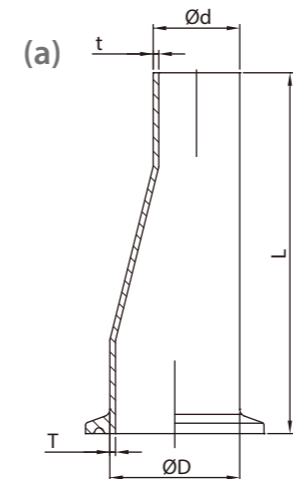


DT-4.1.3-2AE ECCENTRIC REDUCER (DT-26)

SIZE	ØD	Ød	T	t	L	L1
3/4"×1/2"	19.05	12.7	1.65	1.65	76.2	66.68
1"×1/2"	25.4	12.7	1.65	1.65	88.9	76.2
1"×3/4"	25.4	19.05	1.65	1.65	76.2	66.68
1.5"×1/2"	38.1	12.7	1.65	1.65	—	88.9
1.5"×3/4"	38.1	19.05	1.65	1.65	101.6	88.9
1.5"×1"	38.1	25.4	1.65	1.65	101.6	76.2
2"×1/2"	50.8	12.7	1.65	1.65	—	98.43
2"×3/4"	50.8	19.05	1.65	1.65	—	98.43
2"×1"	50.8	25.4	1.65	1.65	152.4	98.43
2"×1.5"	50.8	38.1	1.65	1.65	101.6	76.2
2.5"×1"	63.5	25.4	1.65	1.65	—	98.43
2.5"×1.5"	63.5	38.1	1.65	1.65	152.4	98.43
2.5"×2"	63.5	50.8	1.65	1.65	107.9	76.2
3"×1"	76.2	25.4	1.65	1.65	—	120.65
3"×1.5"	76.2	38.1	1.65	1.65	203.2	120.65
3"×2"	76.2	50.8	1.65	1.65	158.8	98.43
3"×2.5"	76.2	63.5	1.65	1.65	108	79.38
4"×2"	101.6	50.8	2.11	1.65	263.5	146.05
4"×2.5"	101.6	63.5	2.11	1.65	212.7	123.83
4"×3"	101.6	76.2	2.11	1.65	161.9	114.3
6"×3"	152.4	76.2	2.77	1.65	222.3	203.2
6"×4"	152.4	101.6	2.77	2.11	228.6	161.93

BPE Fittings



DT-4.1.2-10 (DT-28)

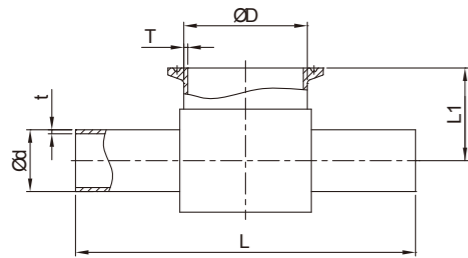

INSTRUMENT TEE WELD/CLAMP END


SIZE	ØD	Ød	L	L1	L2	T	t
1.5"×1/2"	38.1	12.7	127	22.23	152.4	1.65	1.65
1.5"×3/4"	38.1	19.05	127	25.4	152.4	1.65	1.65
1.5"×1"	38.1	25.4	127	28.58	152.4	1.65	1.65
2"×1/2"	50.8	12.7	139.7	25.4	165.1	1.65	1.65
2"×3/4"	50.8	19.05	139.7	28.58	165.1	1.65	1.65
2"×1"	50.8	25.4	139.7	31.75	165.1	1.65	1.65
2"×1.5"	50.8	38.1	139.7	38.1	165.1	1.65	1.65
2.5"×1/2"	63.5	12.7	170	35	195.4	1.65	1.65
2.5"×3/4"	63.5	19.05	170	38.1	195.4	1.65	1.65
2.5"×1"	63.5	25.4	170	41.3	195.4	1.65	1.65
2.5"×1.5"	63.5	38.1	170	44.5	195.4	1.65	1.65
2.5"×2"	63.5	50.8	170	48	195.4	1.65	1.65
3"×1/2"	76.2	12.7	180	38.1	205.4	1.65	1.65
3"×3/4"	76.2	19.05	180	41.3	205.4	1.65	1.65
3"×1"	76.2	25.4	180	44.5	205.4	1.65	1.65
3"×1.5"	76.2	38.1	180	48	205.4	1.65	1.65
3"×2"	76.2	50.8	180	50.8	205.4	1.65	1.65
3"×2.5"	76.2	63.5	180	54	205.4	1.65	1.65
4"×1/2"	101.6	12.7	220	79.4	245.4	1.65	1.65
4"×3/4"	101.6	19.05	220	82.6	245.4	1.65	1.65
4"×1"	101.6	25.4	220	85.7	245.4	2.11	1.65
4"×1.5"	101.6	38.1	220	88.9	245.4	2.11	1.65
4"×2"	101.6	50.8	220	95.2	245.4	2.11	1.65
4"×2.5"	101.6	63.5	220	98.4	245.4	2.11	1.65
4"×3"	101.6	76.2	220	101.6	245.4	2.11	1.65

DT-4.1.2-11 (DT-29)

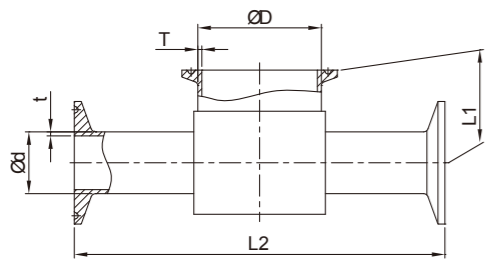

DT-4.1.5-1 AUTOMATIC TUBE WELD CAP(DT-30)


SIZE	ØD	L
1/2"	12.7	38.1
3/4"	19.05	38.1
1.0"	25.4	38.1
1.5"	38.1	38.1
2.0"	50.8	38.1
2.5"	63.5	38.1
3.0"	76.2	44.45
4.0"	101.6	50.8
6.0"	152.4	63.5

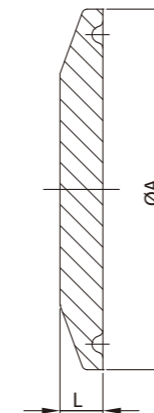

DT-4.1.5-2 SOLID END CAP HYGIENIC CLAMP JOINT(DT-31)


SIZE	ØD	L
1/4"	25	4.75
3/8"	25	4.75
1/2"	25	4.75
3/4"	25	4.75
1.0"	34/50.39	6.35
1.5"	50.39	6.35
2.0"	63.91	6.35
2.5"	77.39	6.35
3.0"	90.91	6.35
4.0"	118.92	7.92
6.0"	166.88	11.1

Heavy Duty Clamp-Ring

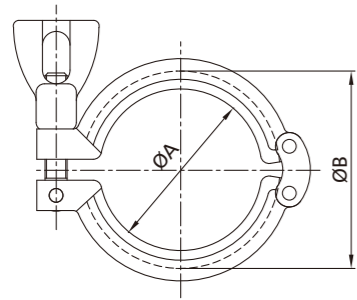


13SF HEAVY DUTY DOUBLE PIN CLAMP

SIZE	ØA	ØB
1/2"~3/4"	20	28
A37	27.5	42.9
1"~1.5"	45	53.6
2"	59	72
2.5"	67	84
3"	85	98
4"	114	127
6"	158	178
8"	210	227
10"	262	278

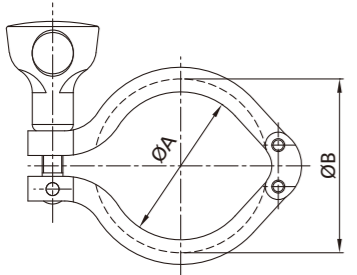


13MHHM DOUBLE PIN CLAMP

SIZE	ØA	ØB
1/2"~3/4"	20	28
A37	28	38
1"~1.5"	43.6	53.6
2"	57	67
2.5"	70.6	80.6
3"	84	94
4"	112	122
6"	155	170
8"	205	220.8

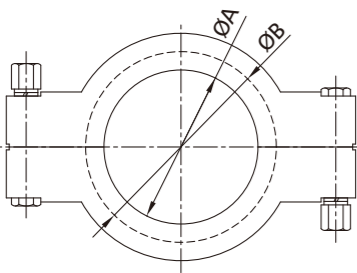

13MHP HIGH PRESSURE BOLTED CLAMP

SIZE	ØA	ØB
1/2"~3/4"	20	28
1"~1.5"	43.32	52
2"	56.44	65.5
2.5"	69.54	79
3"	77.56	92.5
4"	108.86	120.5
6"	158	170
6.5"	173	186.2
8"	205	220.8
10"	258.2	276.8
12"	309	327.6




13MHHS 3 PIECE CLAMP

SIZE	ØA	B
1"~1.5"	54	80
2"	67.5	94
2.5"	80.9	109
3"	84.4	126
4"	122.4	154

Ferrule Seal


13PG

1/2"-3/4"



1"~8"

DN10~DN200





13PG (EPDM · SILICONE · VITON · PTFE)


Imperial	ØA	ØB
1/2"	9.9	21.8
3/4"	16.3	21.8
A37	19	33
1"	22.7	50
1.25"	29.5	50.5
1.5"	35.9	50
2"	48.6	63.5
2.5"	61.3	76.2
3"	74	88.9
3.5"	86	105
4"	98.6	118
4.5"	110.5	129
5"	134.7	153
6"	147.8	165
8"	198.6	216

ISO(PTFE)	ØA	ØB	DIN(EPDM)	ØA	ØB
DN8	11.1	33.2	DN10	9.8	33.2
DN12	14.8	33.2	DN15	15.8	33.2
DN15	18.9	33.2	DN20	19.8	33.2
DN20	24.5	49.7	DN28	25.8	49.7
DN25	31.3	49.7	DN34	31.8	49.7
DN32	40	49.7	DN40	37.8	49.7
DN40	45.9	63.2	DN52	49.8	63.2
DN50	57.1	76.7	DN70	66.8	90.2
DN65	72.9	90.2	DN85	81.8	105.2
DN80	85.7	105.2	DN101.6	98.4	118.2
DN100	109.9	129.2	DN104	100.8	118.2
DN125	134.5	154.2	DN125	125.8	154.2
DN150	163.1	182.2	DN150	150.8	182.2
DN200	211.9	232.7	DN200	200.8	232.7

13PG(EP+PT)




1.0"~4.0"



Imperial 13PG(EP+PT)

SIZE	ØA	ØB
1/2"	10	21.5
3/4"	16.3	21.8
1"	22.5	50.2
1.5"	34.9	50.2
2"	47.6	63.5
2.5"	60.5	77.7
3"	73.2	90.5
4"	97.7	118.4

13FG



FLANGE TYPE 13FG

SIZE	ØA	ØB
1"	22.8	52.7
1.5"	35.8	52.7
2"	48.8	66.2
2.5"	60.5	79.7
3"	73.1	93.2
4"	97.8	121.2
6"	148	169.1
8"	217.9	220.1
10"	249	270.7
12"	300	321.5